inta

Vandal Resistant Shower Panel

Introduction

The Intatec range of vandal resistant shower panels is designed for use within commercial applications such as schools, prisons, sports centres etc. The robust construction and high quality of materials used makes it ideal for use in hostile or high use environments.

designed for use in **commercial** washrooms



- High grade stainless steel
- TMV3 Approved
- WRAs Approved timed flow control
- Concealed fixings
- Pre-plumbed fittings
- Fully serviceable panel
- Non thermostatic and Infra red options available
- Vandal resistant

Product Range

Description	Finish	Code No.
Shower panel with timed flow control	Stainless Steel	SP9200CP
and TMV3 mixing valve		


Vandal Resistant Shower Panel



Vandal Resistant Shower Panel

Features

 Technical Specification 	
Max Operating Pressure	10 Bar
Min Operating Pressure	0.5 Bar
Max Inlet Temperature	65°C
Inlet Connections	15mm compression
Timed Flow	15 ± 3 seconds

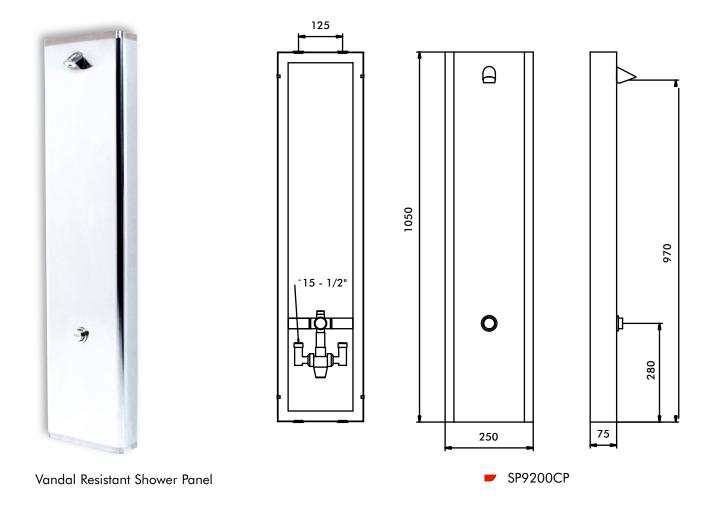





INTATEC LIMITED, AIRFIELD INDUSTRIAL ESTATE, HIXON, STAFFORD, ST18 0PF T. 01889 272180 F. 01889 272181 E. SALES@INTATEC.CO.UK WWW.INTATEC.CO.UK | WWW.ANTISCALD.CO.UK