


## Tubular Infrared Wall Mounted Tap

**infra red  
technology  
with a  
modern tubular  
design**

### Introduction

The Intatec range of infra-red tubular taps provide a ease of use service whilst combining design with high quality into a vandal resistant product.

- Programmable flow time
- Self adjusting sensor
- Operating pressure range of 0.5 to 8 bar
- Security shut off after 90 seconds
- Manual Temperature Adjustment
- Security shut off after 90 seconds

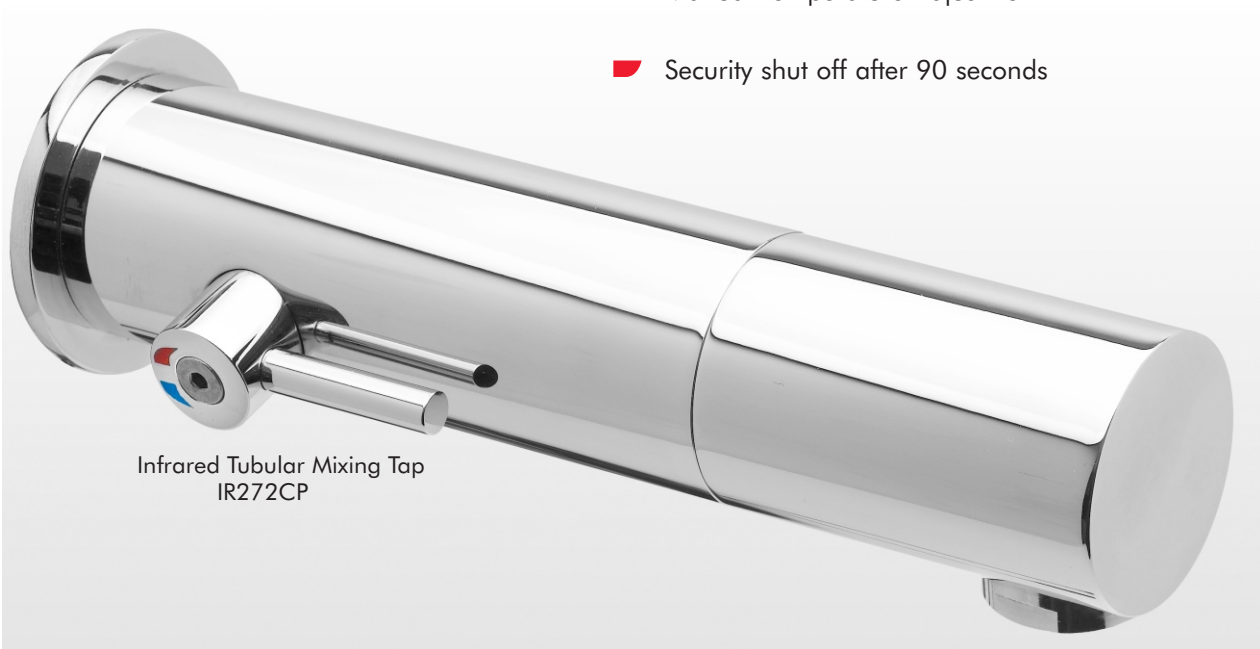


Infrared Tubular Mixing Tap  
IR272CP

### Product Range

Description	Code
Infrared Tubular mixing tap 170mm length (battery operated)	IR272CP
Infrared Tubular mixing tap 170mm length (mains operated)	IR273CP
Infrared Tubular mixing tap 220mm length (battery operated)	IR274CP
Infrared Tubular mixing tap 220mm length (mains operated)	IR275CP

## Tubular Infrared Wall Mounted Tap

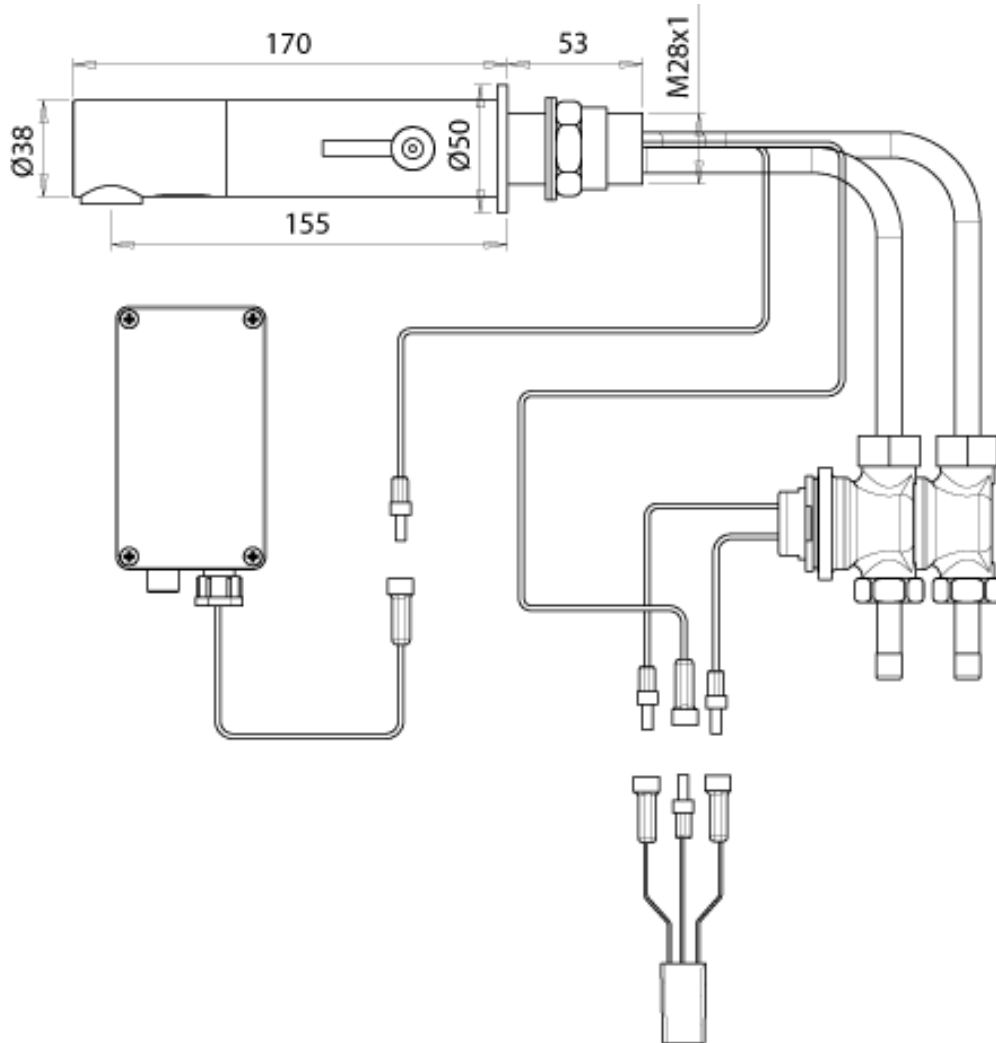

### Features

#### ■ Technical Specification

Max Inlet Pressure static	8 Bar
Min Inlet Pressure dynamic	0.5 Bar
Max Inlet Temperature	70°C
Inlet Connections	10 mm Spigot
Minimum Sensor Range	80mm
Maximum Sensor Range	300mm