

TECHNICAL DATA SHEET

SONIQUE

Thermostatic Surface Mounted Shower Valve With Adjustable Riser


Product Specification

Product Code: SOQ2 SHXAR C
Finishes: Chrome
Product Type: Contemporary
Construction: Body is of Brass Construction
Cartridge Type: Thermostatic
Supply: Suitable for all plumbing systems, preferably balanced
Inlet Connections: 15mm Compression
Outlet Connections: G1/2"
Water Pressure: Min 0.1 bar Max. 5.0 bar
Dimensions: 110-155mm inlet centres



Additional Information

- On/off and temperature are controlled by an easy to use single lever
- Thermostatic cartridge maintains showering temperature to +/- 1 degree
- Automatic shut-off in the event of hot or cold water supply failure
- Factory set to a maximum of 43°C to eliminate the ability to select on unsafe temperature
- Supplied with 1.5m shower hose, riser rail, hose retainer and single function rub clean handset
- Swivel inlet elbows with 110-155mm centres. Valve can be fed from top, bottom or rear
- Chrome plated to BS EN 248

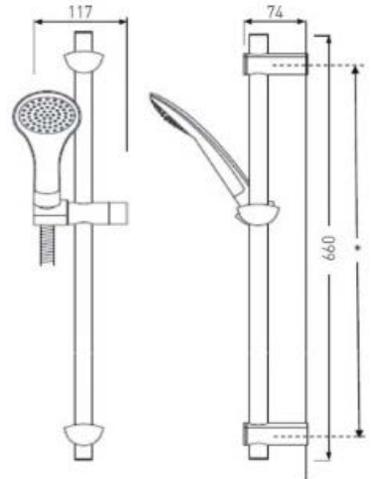

Flow Rates (litres per minute)

System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
With Flow Regulators	---	---	---	6.7	7.2	7.5	7.8
Without Flow Regulators	5.9	10	18.9	26.73	37.8	46.3	59.77

Compliance / Approvals

WRAS Approval No: 1403029
TMV2 Approval No: BC1272/1013
TMV2 Designations: HP-SE and LP-S

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

