

TECHNICAL DATASHEET

DESIGN UTILITY LEVER

Bar Shower Mixer with Adjustable Riser Kit and Fast Fit Fittings


Product Specification

Product Code:	DUL2 SHXARFF C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Cartridge Type:	Thermostatic Cartridge
Supply:	Nominally equal (balanced) inlet supply pressures are required for optimum performance.
Inlet Connections:	15mm compression
Working Pressures:	Min 0.2bar, Max 5.0bar
Dimensions for Fitting:	150mm inlet centres



Additional Information

- Dual control – Flow and temperature are controlled separately, giving accurate control of both
- Factory set to a maximum of 38°C to eliminate the ability to select an unsafe temperature – this is adjustable to suit user preference and up to a maximum of 46°C.
- Supplied with WMNT10 C fast fit connections.
- Chrome plated to BS EN 248
- Supplied with 1.5m hose, riser rail, hose retainer and single function handset.
- If pressures are unequal, then a pressure reducing valve should be used

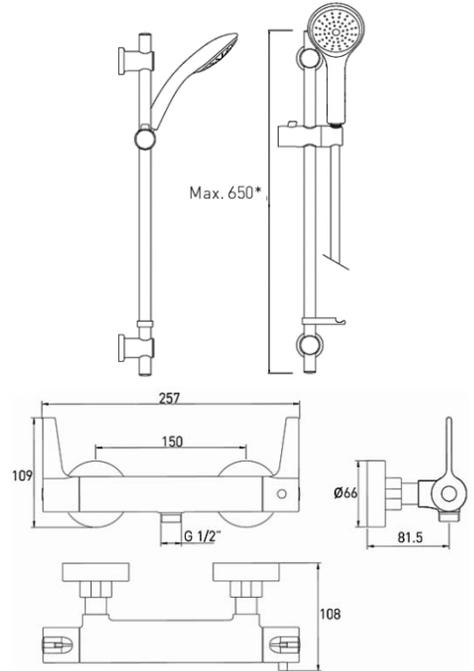

Flow Rates (litres per minute)

System Pressure (bar)	0.2	0.5	1.0	2.0	3.0	5.0
Open Outlet	5.7	10.1	14.6	20.6	25.3	29.8

Compliance/Approvals

WRAS: Manufactured to comply with WRAS & TMV2
TMV2 Designation: HP-S

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com

