

# TECHNICAL DATA SHEET


SONIQUE

Thermostatic Recessed Shower Valve

With Adjustable Riser

### Product Specification

Product Code:	SOQ2 SHCAR C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of Brass Construction
Cartridge Type:	Thermostatic
Supply:	Suitable for all plumbing systems, preferably balanced
Inlet Connections:	15mm Compression
Outlet Connections:	G1/2"
Water Pressure:	Min 0.1 bar Max. 5.0 bar
Dimensions:	152mm inlet centres

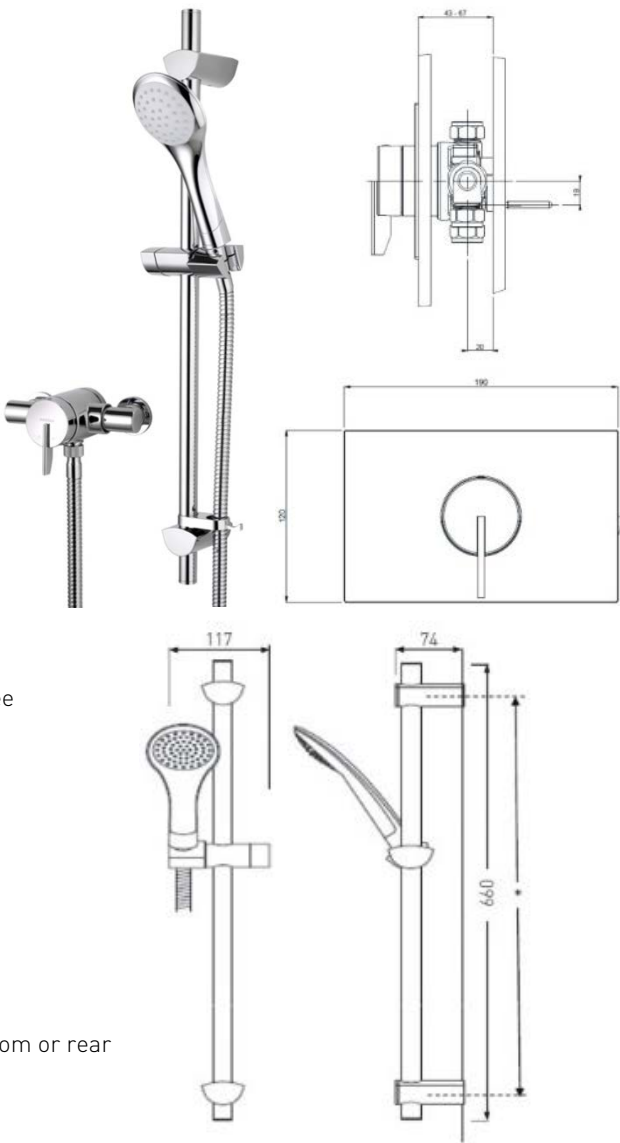

### Additional Information

- Flow and temperature are controlled by an easy to use single lever
- Thermostatic cartridge maintains showering temperature to +/- 1 degree
- Automatic shut-off in the event of hot or cold water supply failure
- Factory set to a maximum of 43oC to eliminate the ability to select on unsafe temperature
- Supplied with 1.5m shower hose, riser rail, hose retainer and single function rub clean handset
- Concealing plate included, riser brackets can be adjusted to cover existing holes in the wall surface
- Suitable for wall cavity depths between 43-67mm
- Swivel inlet elbows with 152mm centres. Valve can be fed from top, bottom or rear
- Chrome plated to BS EN 248

### Flow Rates (litres per minute)


System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
With Flow Regulators	---	---	---	7.3	8	8.7	9.2
Without Flow Regulators	5.7	9	15.6	22.06	31.2	38.21	49.33

### Compliance / Approvals

WRAS Approval No:	1404020
TMV2 Approval No:	BC1294/1013
TMV2 Designations:	HP-SE and LP-S

Technical Advice: For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

Guarantee: 5 years covering manufacturing faults.

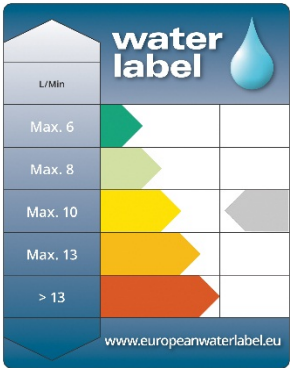

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)

