

## TECHNICAL DATASHEET

### COMMERCIAL OPAC THERMOSTATIC CONCEALED SHOWER VALVE WITH CHROME LEVER


#### Product Specification

Product Code:	OP TS1503 CL C
Finish:	Chrome
Product Type:	Commercial
Construction:	Body is of brass construction and is designed to conform to BS EN 1111:1999 (HP) & BS EN 1287:1999 (LP)
Valve Type:	Thermostatic Cartridge
Supply:	Suitable for all plumbing systems (Preferably balanced)
Inlet Connections:	15mm compression elbows
Outlet Connections:	½" BSP
Working Pressures:	Min 0.2bar, Max 8.0bar Maximum Static Pressure: 10.0 bar
Dimensions for Fitting:	130mm inlet centres



#### Additional Information

- Single sequential control for both temperature & flow.
- Anti-vandal stainless steel concealing plate
- Automatic thermostatic shut-off in the event of hot or cold water failure.
- Check valves and serviceable filters as standard
- Supplied as 'valve only' and thus can be customised by choosing accessories from our Pick 'N' Mix showering options. Please see our Product and Price guide for details.
- Inlet centres of 130mm +/- 1mm.
- Chrome plated to BS EN 248.

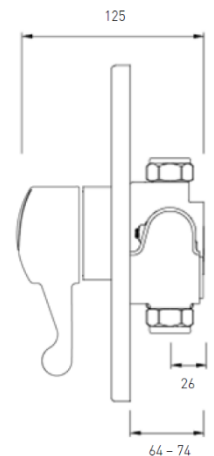

Suitable for wall cavity depths of between 64-74mm

**Technical Advice:** For further information please call 0844 7016273 or email [customer care@bristan.com](mailto:customer care@bristan.com)

**Guarantee:** 1 year covering manufacturing faults.

#### Compliance / Approvals

WRAS: Certificate N<sup>o</sup>: 1311021

TMV2: Certificate N<sup>o</sup>: BC1196/0413    TMV3: Certificate N<sup>o</sup>: BC1197/0413

#### Flow Rates (litres per minute)

System Pressure	0.2bar	0.6bar	1bar	2bar	3bar	4bar	5bar
Open Outlet	12.0	22.0	29.0	42.0	52.0	60.0	66.0