


# TECHNICAL DATA SHEET

## COBALT

### Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter Chrome


#### Product Specification

Product Code:	COB SHCDIV C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Supply:	Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections:	15mm Compression connections
Working Pressures:	Min 0.2 Bar, Max 5.0 Bar

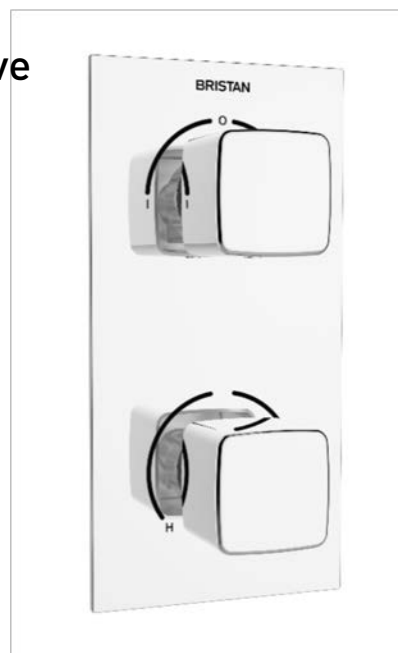

#### Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 9 l/min
- Requires rear access to service the filters
- Cartridge can be accessed from front

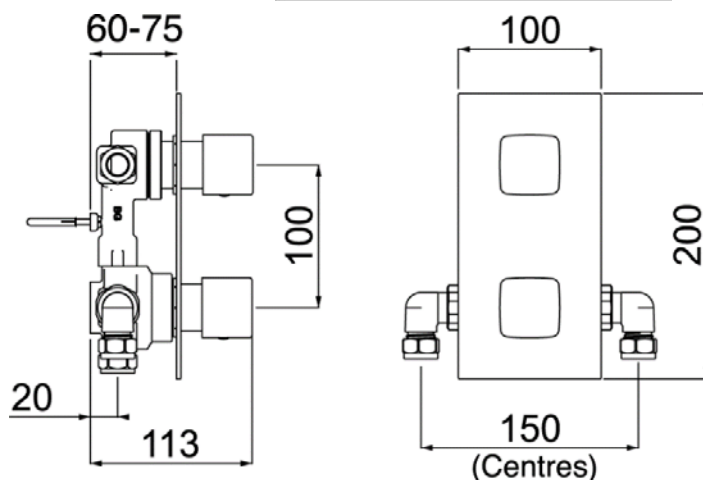

#### Flow Rates (litres per minute)


System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	8.5	13.44	19	26.87	32.91	42.49
Outlet 2	8.27	13.08	18.5	26.16	32.04	41.37

#### Compliance / Approvals

WRAS Approval No: 1507042

Technical Advice: For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

Guarantee: 5 years covering manufacturing faults.

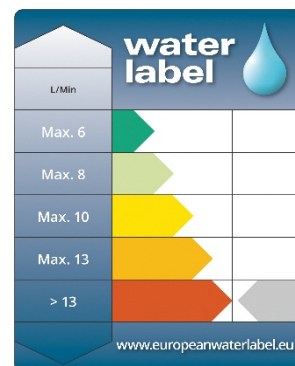

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
 Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)

