

## PRISM

### Recessed Thermostatic Dual Control Shower Valve with Two Integral Stopcocks


#### Product Specification

**Product Code:** PM2 SHC3STP C  
**Finish:** Chrome  
**Product Type:** Contemporary  
**Construction:** Body is of brass construction  
**Cartridge Type:** Ceramic disc valve  
**Supply:** Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.  
**Inlet Connections:** 15mm Compression connections  
**Working Pressures:** Min 0.2 Bar, Max 5.0 Bar



#### Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 9 l/min from stopcock. 12.9l/min from both outlet together
- Fully serviceable from the front

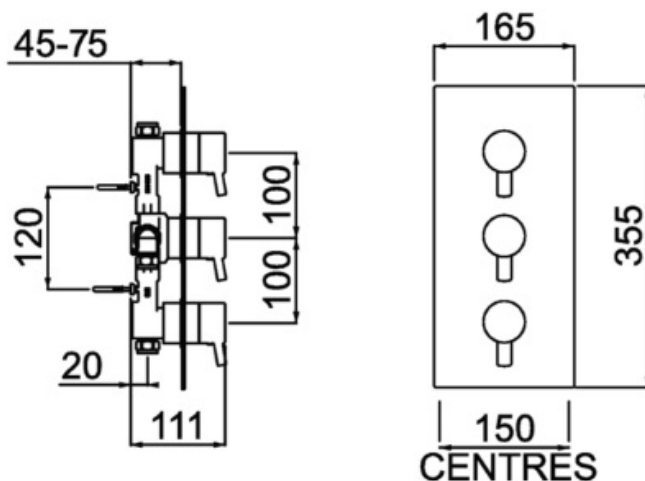

#### Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	9.26	14.64	20.7	29.27	35.85	46.29
Outlet 2	9.3	14.71	20.8	29.42	36.03	46.51

#### Compliance / Approvals

**WRAS Approval No:** 1407023

**Technical Advice:** For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

**Guarantee:** 5 years covering manufacturing faults.

