

OP SHXVO EL C

COMMERCIAL OPAC Shower Range

Opac SHXVO EL Valve Only Chrome



Features

- Cool touch shower valve body for ultimate user safety
- Easy installation with a choice of fixing kits (OP SHXVO WMT or OPSHXVO WMT2)
- Integral flushing mechanism for easy maintenance
- High performance even at low pressure
- Complies to D08 specification

Product Certifications:

Wras Expiry: 30/09/2019
Wras Certificate Number: 1409054



TMV2 Expiry: 18/07/2019
TMV2 Certificate Number: BC1397/0714




TMV3 Expiry: 12/06/2019
TMV3 Certificate Number: BC1402/0614



Specification	
Style:	Commercial
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar
Temperature Control:	Thermostatic
Shower Head Type:	Valve Only
Maximum Temperature Setting: °C	41
Maximum Hot Water Temperature: °C	80
Dynamic Pressure Range: (bar)	Min. 0.2, Max. 5.0
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally balanced
Flow Rate (l/min @ 3 bar)	11.8
Flow Regulator:	Yes
Connection Inlet:	15mm compression
Connection Outlet:	1/2" BSP

Dimensions (measurements in mm)

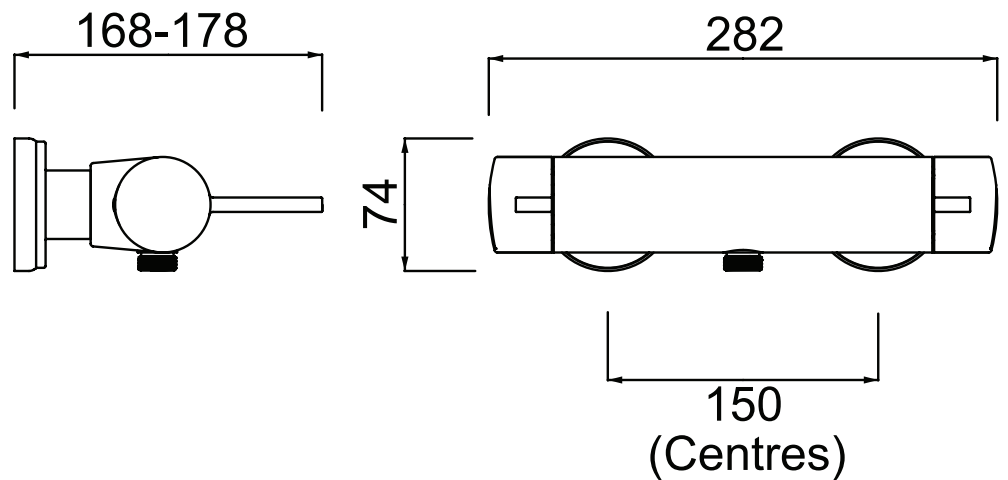

Flow Rates (l/min)							
System Pressure (bar)	0.2	0.5	1	2	3	4	5
OP SHXVO EL C (Flow Regulators Fitted)	-	9.4	9.5	11.3	11.8	11.7	11.4
OP SHXVO EL C (Without Flow Regulators Fitted)	8.5	15.1	22.0	-	-	-	-

Also available from the OPAC Shower Range is:



TECHNICAL DATA SHEET

BRISTAN