

SM395 W

SMILE Shower Range Smile 9.5kw Electric Shower White



| Specification | |
|--------------------------------|--------------------------|
| Style: | Contemporary |
| Finish/Colour: | White |
| Main Construction Material: | ABS |
| No of Controls: | 3 |
| Control Type: | Push Button & Dials |
| Shower Type: | Electric Shower |
| Shower Head Type: | Single Function Handset |
| Working Pressure Range: (bar) | Min 0.7 Bar, Max 10 Bar |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | Mains Cold Feed Only |
| Connection Inlet: | 15mm Push-Fit Connection |
| Connection Outlet: | G 1/2" |
| Thermostatic: | No |
| Isolation Valve Included: | No |
| Check Valve Included: | No |
| Power Rating: | 9.5kW (12% more flow) |
| Phased Shutdown Feature: | No |
| Energy Rating: | A |

Features:

- On/off button; start the shower at the temperature last used.
- Single-mode rub clean handset, to remove limescale build-up.
- Multiple water/electrical cable entry points and adjustable riser rail fixing bracket, ideal for replacing an existing electric shower.
- Versatile footprint, covers most manufacturers fixing holes.

Product Certifications:


WRAS Certificate No: 1312053
WRAS Expiry Date: 31/12/2018



Intertek



Also available from the SMILE Shower Range is:

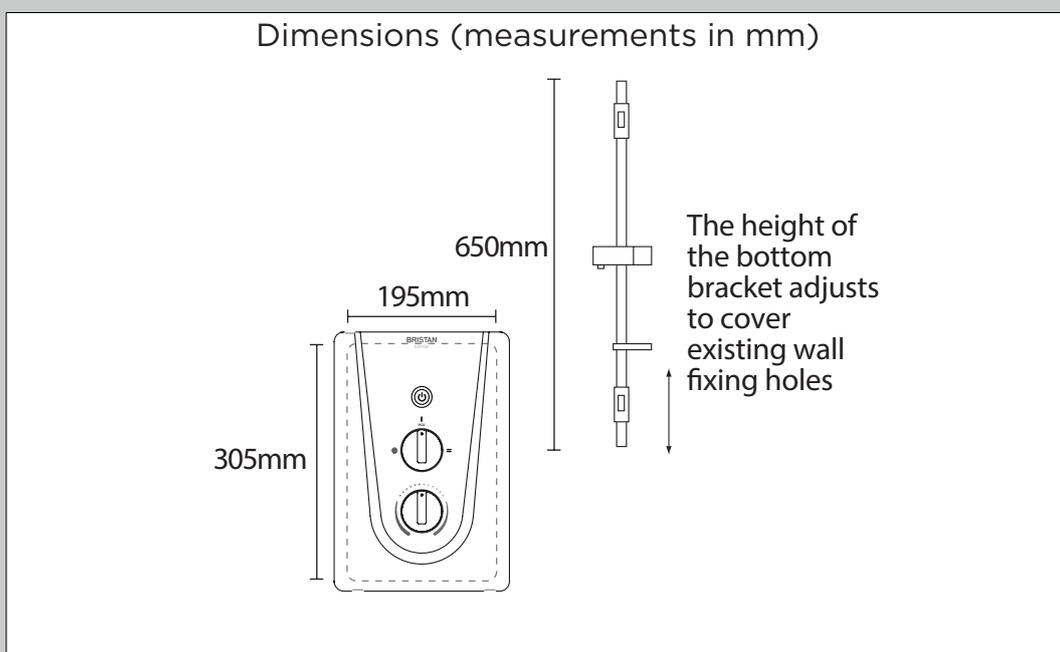

| Flow Rates (l/min) | | | |
|--|-------|-------|--------|
| Power | 8.5kW | 9.5kW | 10.5kW |
| Flow Rate | 4.5 | 5.1 | 5.6 |
| Quoted as per European Water Label (EWL) scheme conditions: Output - 42°C, Input - 15°C, Voltage - 240V | | | |

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D9