










CD MIXER 452101 – SINK MIXER

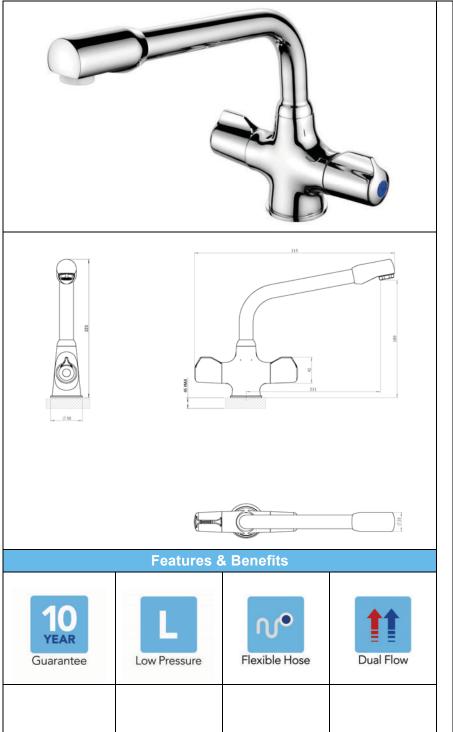

	Speci	ficatio	n			
Finish	Ch	rome				
Body	Brass					
Fittings	Fittings Metal plate, was stud & locking n					
Connection M12 – DN8 flexible with ½" BSP threat						
Min dyn	;	0.1				
Max dyn		6				
Max static pressure 16						
Max water temperature					85°C	
Flow rates						
Pressure	0.1	0.5	1		3	
L/min	4	15.1	22.3	3	40.6	

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

\sim	4 1 01			
Cer	TITL	rat	ını	ne



18110801 - Oct 23



Tested at 0.2 bar

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

