





## SENSOR TAPS

### 343051 – WALL CAPACITIVE

# Performa

BY **COMAP**

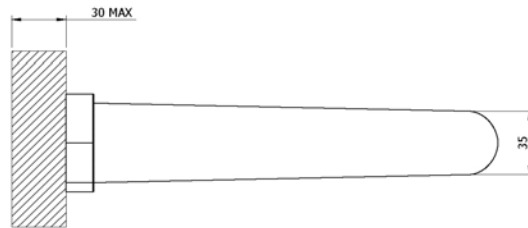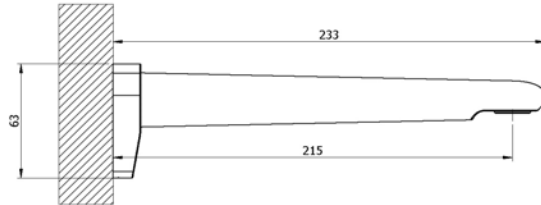

#### Specification

Finish	Chrome
Body	Brass
Fittings	Metal plate, stud & locking nut
Connection	M12 – DN6 flexible hoses with 1/2" BSP threaded ends

Min dynamic pressure 0.1

Max dynamic pressure 6

Max static pressure 16

Max water temperature 60°C

#### Flow rates

Pressure	0.1	0.5	1	3
L/min	1.7	5.2	5.7	6

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

#### Features & Benefits



Guarantee



Low Pressure



Flexible Hose



Flow Aerator



Single Flow

#### Certifications



1704014 - April 22

Tested at 0.2 bar