










WATERFALL 4K7004 – H PATTERN BATH FILLER

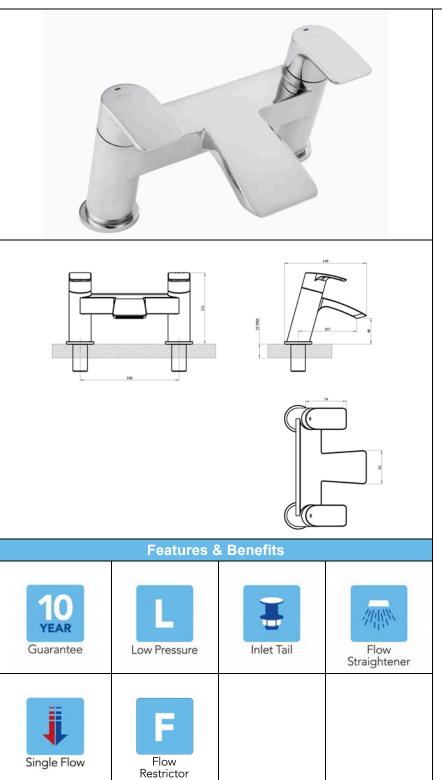

Finish Chrome Body Brass Fittings Metal backnut & washer Connection %" BSP threaded tail Min dynamic pressure 0.1 Max dynamic pressure 6 Max static pressure 25 Max water temperature 60°C Flow rates Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications Tested at 0.2 bar	Specification							
Body Brass Fittings Metal backnut & washer Connection %" BSP threaded tail Min dynamic pressure 0.1 Max dynamic pressure 6 Max static pressure 25 Max water temperature 60°C Flow rates Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications								
Fittings Metal backnut & washer Connection %" BSP threaded tail Min dynamic pressure 0.1 Max dynamic pressure 6 Max static pressure 25 Max water temperature 60°C Flow rates Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications			Chrome					
Connection Min dynamic pressure Max dynamic pressure Max static pressure Max water temperature Flow rates Pressure O.1 14 31 27.9 42 + supplied restrictors NA NA All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min	Body		Brass					
Min dynamic pressure 0.1 Max dynamic pressure 6 Max static pressure 25 Max water temperature 60°C Flow rates Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications	Fittings	Metal backnut & washer						
Max dynamic pressure 25 Max static pressure 60°C Flow rates Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications	Connection 3/4" BSP threaded ta							
Max static pressure 25 Max water temperature 60°C Flow rates Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications	Min dyn	essure	e 0.1					
Max water temperature 60°C Flow rates Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min	Max dynamic pressure						6	
Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min	Max static pressure						25	
Pressure 0.1 0.5 1 3 L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications	Max water temperature						60°C	
L/min 14 31 27.9 42 + supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min	Flow rates							
+ supplied restrictors NA NA 31.4 36.3 All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min	Pressure	0.	1	0.5	1		3	
All Pressures are in Bar. Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min	L/min	14	4	31	27.9		42	
Dimensions supplied are nominal and subject to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min	• • •	N.	A	NA	31.4		36.3	
to tolerance. Performance details are based on trials under test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 l/min	All Pressures are in Bar.							
test conditions and for guidance only. The Company reserves the right to change product specification without prior notice. Certifications 19.9 I/min								
Certifications Certifications 19.9 I/min								
19.9 l/min								
	Certifications							
Tested at 0.2 bar	19.9 l/min							
	T 1 1 1 6							

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

