

Shower Kit

Included

Single Flow










## WATERFALL 4K7005 – H PATTERN BATH SHOWER MIXER

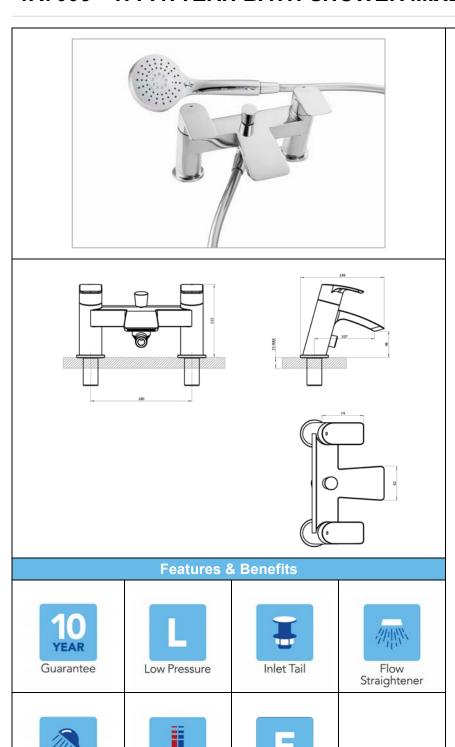

Specification						
Finish	Chrome					
Body	Brass					
Fittings		Metal backnut & washer				
Connection	ı	3/4" BSP threaded tail				
Min dynamic pressure					0.1	
Max dynamic pressure					6	
Max static pressure					25	
Max water temperature					60°C	
Flow rates						
Pressure	0.1		0.5	1		3
L/min	13		21	26.4	1	40.5
+ supplied restrictors	NA		NA	29.9		37.4
All Pressures	are i	n Ba	r.			
Dimensions su to tolerance.	uppli	ed aı	re nomin	al and	su	bject
	detai	s are	e based	on trial		,
to tolerance.  Performance of	detail and	s are for g	e based guidance the righ	on trial only.	s ι an	under ge
to tolerance.  Performance of test conditions  The Company product specif	detail and rese	s are for e	e based guidance the righ	on trial only. t to ch or noti	s ι an	under ge

Tested at 0.2 bar

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

Flow

Restrictor

