










## STRATA 4K6002 – MINI MONO BASIN

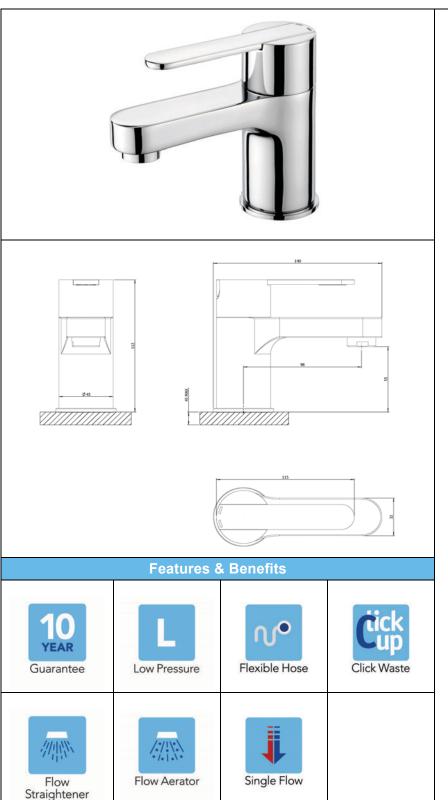

Specification						
Finish	C	Chrome				
Body	E	Brass				
Fittings		Metal plate, washer, stud & locking nut				
Connection		M12 – DN8 flexible hoses with ½" BSP threaded ends				
Min dynamic pressure					0.1	
Max dynamic pressure					6	
Max static pressure					16	
Max water temperature					60°C	
Flow rates						
Pressure	0.1		0.5	1		3
L/min	1.2		6.2	9.6		18

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.


Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

## Certifications







COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

