










## TEMPEST 4K7103 – BATH FILLER



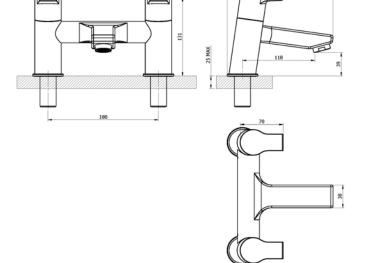

| Features & Benefits     |              |            |                      |  |  |  |  |
|-------------------------|--------------|------------|----------------------|--|--|--|--|
| 10<br>YEAR<br>Guarantee | Low Pressure | Inlet Tail | Flow<br>Straightener |  |  |  |  |
| Flow Aerator            | Single Flow  |            |                      |  |  |  |  |

| Specification        |      |          |        |    |     |  |  |  |
|----------------------|------|----------|--------|----|-----|--|--|--|
| Finish               | Ch   | Chrome   |        |    |     |  |  |  |
| Body                 | Bra  | Brass    |        |    |     |  |  |  |
| Fittings             | Ме   | tal back | washer |    |     |  |  |  |
| Connection           | 3/4" | BSP thre | tail   |    |     |  |  |  |
| Min dynamic pressure |      |          |        |    | 0.1 |  |  |  |
| Max dyr              | 6    |          |        |    |     |  |  |  |
| Max static pressure  |      |          |        |    | 25  |  |  |  |
| Max wat              | 60°C |          |        |    |     |  |  |  |
| Flow rates           |      |          |        |    |     |  |  |  |
| Pressure             | 0.1  | 0.5      | 1      |    | 3   |  |  |  |
| L/min                | 16.1 | 36.6     | 52     | 90 |     |  |  |  |

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.


Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

| COP | 31.37 | ant. | ior | 10 |
|-----|-------|------|-----|----|
| Cer | 1111  | sat. | IUI | 13 |
|     |       |      |     | -  |



Tested at 0.2 bar



COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

