










STRATA 4K6009 – DUAL CONTROL BSM

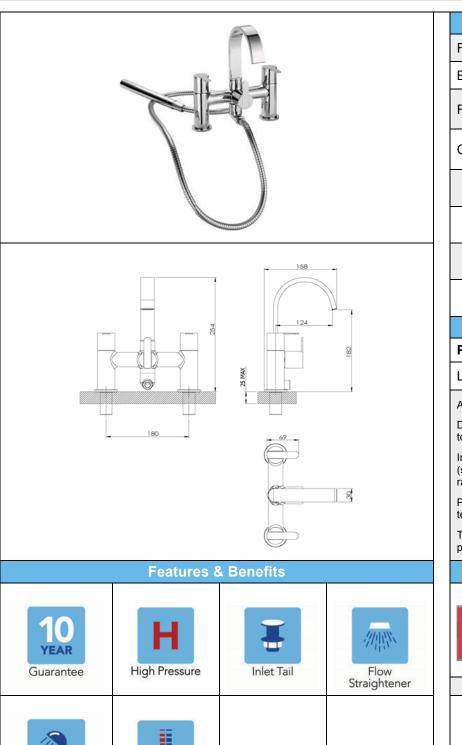

Single Flow

Shower Kit Included

| Specification | | | | | | |
|-----------------------|------|------------------------|------|---|------|--|
| Finish | Ch | Chrome | | | | |
| Body | Bra | Brass | | | | |
| Fittings | Me | Metal backnut & washer | | | | |
| Connection | 3/4" | 3/4" BSP threaded tail | | | | |
| Min dynamic pressure | | | | | 0.4 | |
| Max dynamic pressure | | | | | 6 | |
| Max static pressure | | | | | 25 | |
| Max water temperature | | | | | 60°C | |
| Flow rates | | | | | | |
| Pressure | 0.1 | 0.5 | 1 | | 3 | |
| L/min | 3.4 | 13.1 | 19.5 | 5 | 33.1 | |

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

| Certifications | | | | |
|-------------------|--|--|--|--|
| å 33 l/min | | | | |
| Tested at 3 bar | | | | |
| | | | | |

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

