










STRATA BLADE 4K6051 - BATH PILLAR TAP PAIR

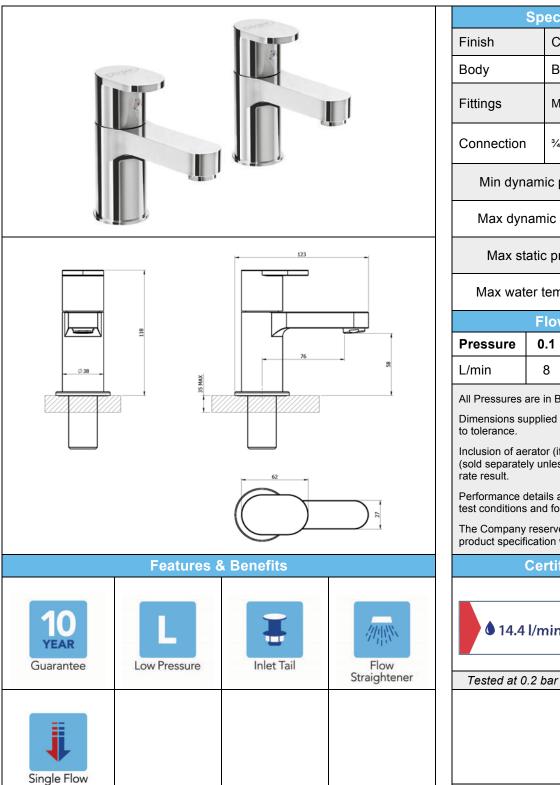

	Specification					
Finish	Chrome					
Body	Br	ass				
Fittings	Me	Metal backnut & washer				
Connection	nnection 3/4" BSP threaded tail					
Min dynamic pressure 0.1						
Max dynamic pressure 6						
Max static pressure 16						
Max water temperature					85°C	
Flow rates						
Pressure	0.1	0.5	1		3	
L/min	8	24.2	35		62.1	

All Pressures are in Bar.

Dimensions supplied are nominal and subject

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

	40			
Δľ		cat	חוי	ne



COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

