










## STRATA BLADE 4K6054 - TALL MONO BASIN

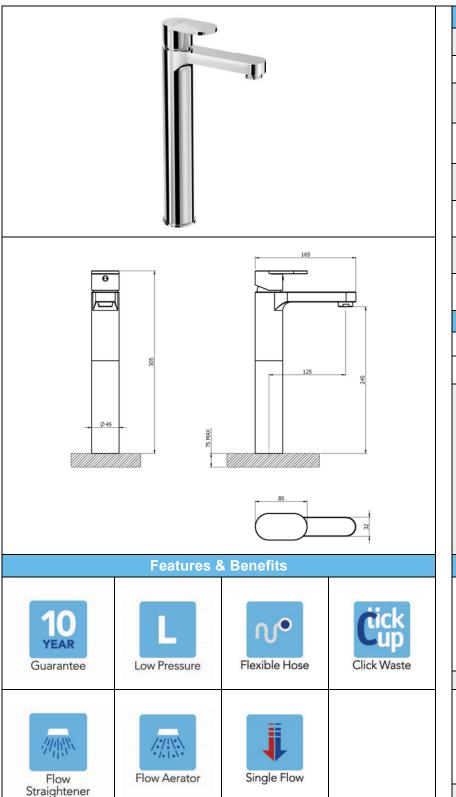

Specification					
Finish	Cł	rome			
Body	Br	Brass			
Fittings		Metal plate, washer, stud & locking nut			
Connection		M12 – DN8 flexible hoses with ½" BSP threaded ends			
Min dynamic pressure				0.1	
Max dynamic pressure				6	
Max static pressure				16	
Max water temperature				60°C	
Flow rates					
Pressure	0.1	0.5	1		3
L/min	1.1	5.9	9.1		17.2

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

## Certifications





Tested at 0.2 bar



COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

