










STRATA BLADE 4K6056 – MONO BATH FILLER

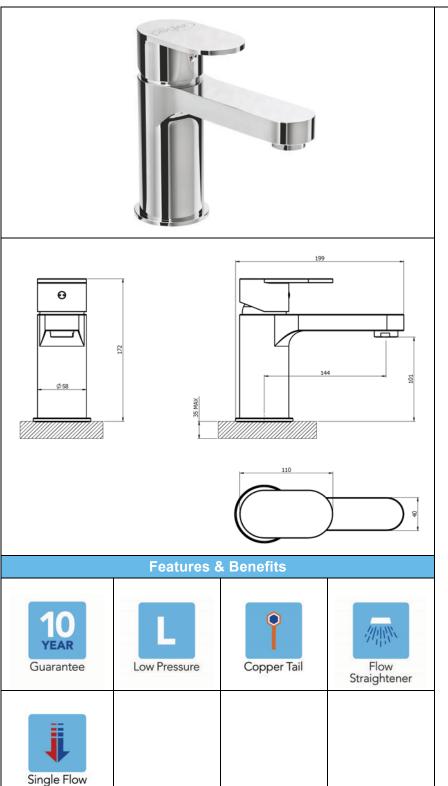

Specification						
Finish	Cr	Chrome				
Body	Br	Brass				
Fittings		Metal plate, stud & locking nut				
Connection		M16 x 1 – 15mm copper tube				
Min dynamic pressure					0.1	
Max dynamic pressure					6	
Max static pressure					16	
Max water temperature					60°C	
Flow rates						
Pressure	0.1	0.5	1		3	
L/min	4.3	15.8	23.5	5	43	

All Pressures are in Bar.


Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

COM	41410	2011		
Cer		.ali	UI	-



Tested at 0.2 bar

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

