

Single Flow










## STRATA BLADE 4K6059 – BATH FILLER

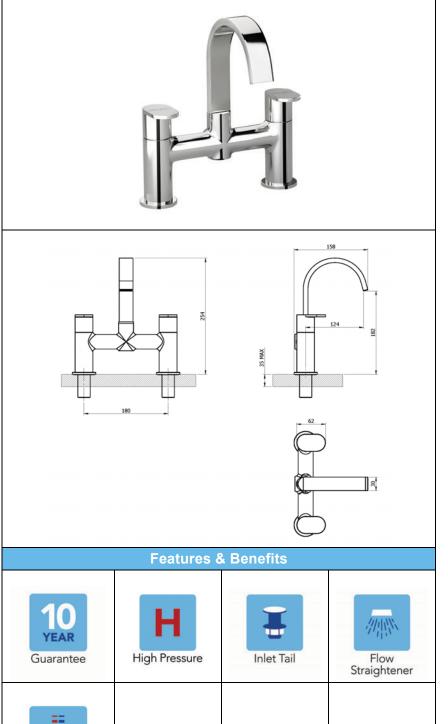

Specification						
Finish	(	Chrome				
Body	ı	Brass				
Fittings	ı	Metal backnut & washer				
Connection	3	3/4" BSP threaded tail				
Min dynamic pressure						0.4
Max dynamic pressure						6
Max static pressure						25
Max water temperature						85°C
Flow rates						
Pressure	0.1		0.5	1		3
L/min	3.3	}	15.6	22.7	7	37.5

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

Certifications				
<b>å</b> 37.5 l/min				
Tested at 3 bar				

COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

