
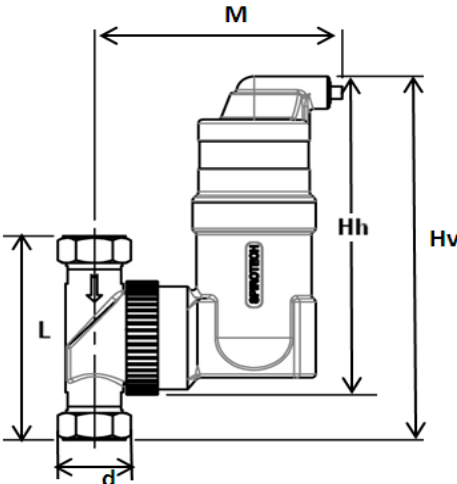


<b>SPIROTECH SPECIFICATION SHEET</b>		<b>SPIROTECH</b> 	
Version 16.1 / BDB			
Product: SpiroVent deaerator 22 mm Compression fitting		Type: UA022W	
Customer:			
Project:		Date: 16-3-2016	
Reference:			
<b>Design criteria</b>		<b>Drawing:</b>	
Medium:	Water / glycol (max 50%)		
Max. flow velocity:	1 m/s		
Max. flow rate:	1,30 m3/h		
Max. pressure:	6 bar-g		
Max. temperature:	110 °C		
Design standard:	EN 13445		
<b>Testing and quality assurance</b>			
Leakage test:	no		
Test certificate:	no		
Design and manufacturing acc. 97/23/EC:	yes		
Material certificates (structural parts):	no		
Drawing:	no		
<b>Construction materials</b>		<b>Dimensions:</b>	
Body:	Brass	d	22 mm
Deaeration cap:	Brass	Hv	205 mm
Valve sealing:	Viton	Hh	177 mm
Float:	PP	L	120 mm
Spirotube Tube:	Copper	M	125 mm
Wire:	Copper	Volume:	0,22 ltr
Solder:	Tin(SnCu3)	Dry weight (approx):	1,8 kg
		Subject to changes	