












**Specification** 

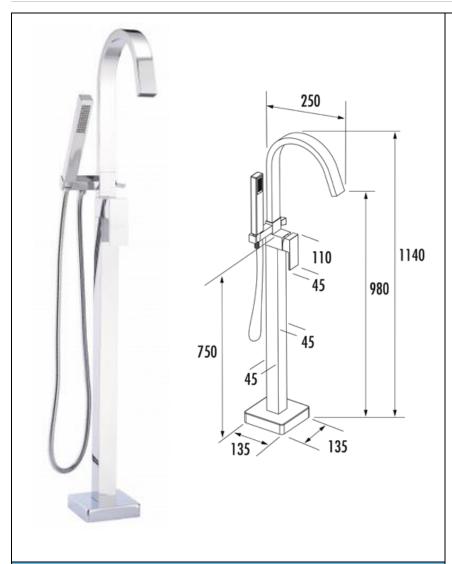

			•			
Finish	Ch	Chrome Plated				
Body	Bra	Brass				
Fittings						
Connection						
Min dynamic pressure					0.4	
Max dynamic pressure					5	
Max static pressure					10	
Max water temperature					65°C	
Flow rates						
Pressure	0.1	0.5	1		3	
L/min	3.2	7.7	11.4	ļ	20.3	

All Pressures are in Bar.

Dimensions supplied are nominal and subject to tolerance.

Inclusion of aerator (if supplied) or restrictors (sold separately unless stated) will affect flow rate result.

Performance details are based on trials under test conditions and for guidance only.

The Company reserves the right to change product specification without prior notice.

Features & Benefits						
10 YEAR Guarantee	High Pressure	Flexible Hose	Shower Kit Included			
Flow Straightener	Single Flow					



COMAP UK Ltd. Unit C6, William Way, Moss Ind Est, St Helens Rd, Leigh. Lancashire. WN7 3PT www.comaptaps.co.uk

