

The iT500BM internet thermostat



Can be used with any of the three receivers below. Giving you more choice and freedom to control your heating from anywhere...



RXBC605



RXVBC605



RXWBC605


- Complies with the warranties of all leading boiler manufacturers
- Compatible with your PC or Smartphone
- Your PC and smartphone connects to the system using your existing broadband connection
- The internal system uses 868Mhz for robust communication
- System is secure and energy efficient
- The internal system is wireless so its easy to install
- Single zone heating
- For combination boilers only



For more information please
contact the SALUS sales team...
Tel: 01226 323961
www.salus-tech.com


SALUS
CONTROLS

How it works...

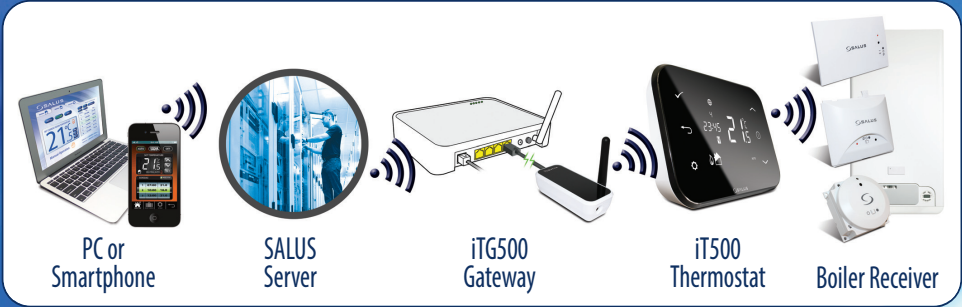

The iTG500 Gateway

The iTG500 connects via a short cable to your broadband internet router. The gateway enables internet access and control of your system. Dimensions 90mm(L) x 40mm(W) x 25mm(H).

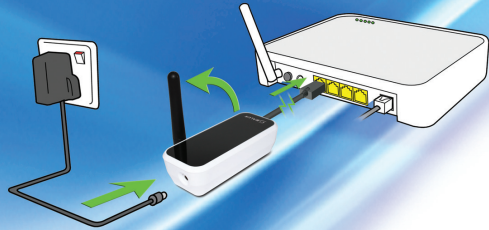

The iT500 Thermostat

This will replace your existing thermostat. Dimensions 125mm(L) x 90mm(W) x 25mm (H)



The Boiler Receiver

This is a wireless receiver that will connect to your boiler. It is suitable for combination boilers. Choose from one of these...

- RXVBC605: Dimension 145mm (W) 20mm(D) x 98mm(H)
- RXWBC605: Dimension 130mm (W) 25mm(D) x 108mm(H)
- RXBC605: Dimension 58mm (W) 30mm(D) x 58mm(H)



Contents of the box



iT500TR Thermostat

iTG500 Gateway

iT500 Power adaptor

Optional Stand

Bracket

Wall mount

ADSL Cable

Fixing screws & plugs