



### Features:

- Long life ceramic cartridge for added durability and ease of use
- Metal fixing nut for added durability
- Includes clicker waste
- Minimum working pressure of 0.3 bar
- Requires minimum operating pressure 0.3 bar

### Product Certifications:



For more products, visit our website:  
<http://www.bristan.com>




## TECHNICAL DATA SHEET

### Specification

<b>Product Type:</b>	Bathroom Tap
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Deck Mounted
<b>Handle Type:</b>	Lever Handle
<b>Connection Inlet:</b>	M10 x 15mm Screw-in Copper Pipes
<b>Connection Outlet:</b>	M20 Flow Straightener
<b>Number of Tap Holes:</b>	1
<b>Valve/Cartridge Type:</b>	25mm Ceramic Cartridge
<b>Plumbing System Requirements:</b>	Suitable for all plumbing systems
<b>Minimum Dynamic Pressure (bar):</b>	0.3 bar
<b>Maximum Dynamic Pressure (bar):</b>	5.0 bar
<b>Maximum Hot Water Temperature °C:</b>	65°C
<b>Maximum Static Pressure (bar):</b>	10 bar
<b>Flow Type:</b>	Single Flow
<b>Isolation Included:</b>	No

### Dimensions (measurements in mm)

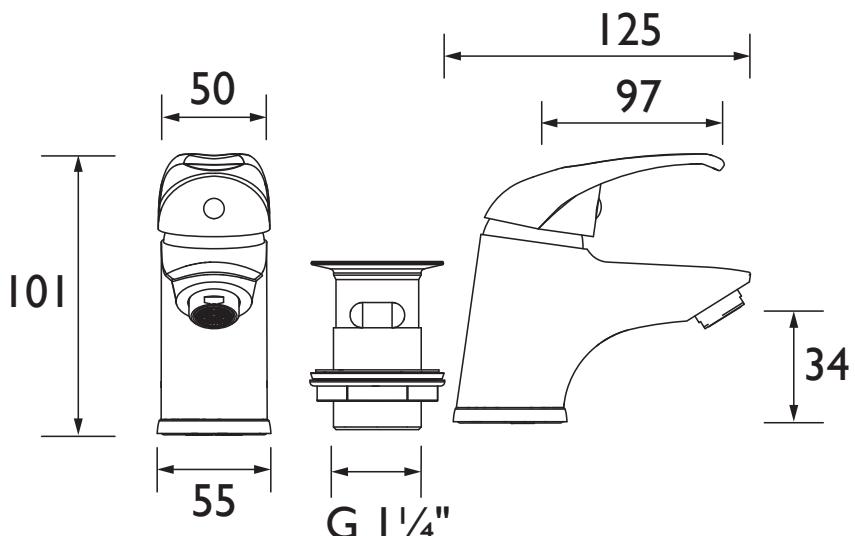

### Flow Rates (l/min)

System Pressure (bar)	0.3	1	2	3	5
J MBAS C (mixed)	7.3	10.4	14.7	18	23.2



**BRISTAN**