OR BF C

ORTA Tap Range Orta Bath Filler Chrome



Specification				
Product Type:	Taps			
Main Construction Material:	Brass			
Mount Type:	Deck Monuted			
Handle Type:	Lever Handles			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M24 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valves			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy to use metal handles
- Chrome plated to BS EN 248

Product Certifications:



WRAS Cert. Number: 30/09/2021 WRAS Expiry Date: 1609014






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

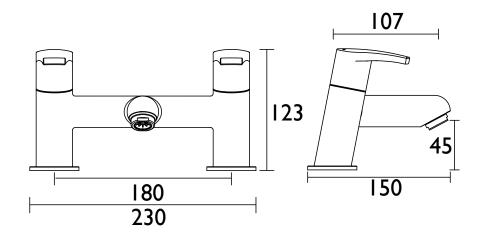

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
OR BF C (mixed)	23.7	37.5	53	75	91.8	118.5		

TECHNICAL DATA SHEET



