PEA PULLSNK C

PEAR Tap Range Pear Monobloc Sink Mixer with Pull Out Spray Chrome



		A		
$-\epsilon$	\sim	т I	ıra	c.
1 5	- (CI	L L	ire	э.

- Long life ceramic cartridge for added durability and ease of use
- Metal fixing nut for added durability
- Minimum working pressure of 1.5 bar
- Flexible tails included
- Particular attention should be paid to this product which will need to be installed in accordance with your local Water Authority/Water Regulations

Product Certifications:






For more products, visit our website: http://www.bristan.com



Specification					
Product Type:	Taps				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever Handle				
Connection Inlet:	1/2" BSP				
Connection Outlet:	Handset with Spray Function				
Number of Tap Holes:	1				
Valve/Cartridge Type:	40mm Cartridge				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	1.5 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Dual Flow				
Isolation Included:	No				

Dimensions (measurements in mm)

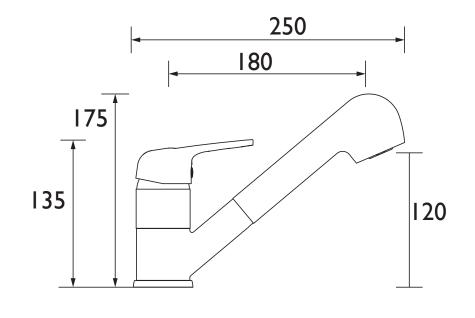

Flow Rates (I/min)								
System Pressure (bar)	1.5	2	3	4	5			
PEA PULLSNK C (mixed)	7.7	9.6	10.9	12.5	15.1			

TECHNICAL DATA SHEET



