



Features:

- Includes 1.5m hose, handset and wall bracket
- Wall bracket and single function handset
- Chrome plated to BS EN 248

Product Certifications:



25.3 l/min


For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Crosshead
Connection Inlet:	3/4" BSP
Connection Outlet:	Antisplash
Number of Tap Holes:	2
Valve/Cartridge Type:	1/2" Standard Valves
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5.0 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

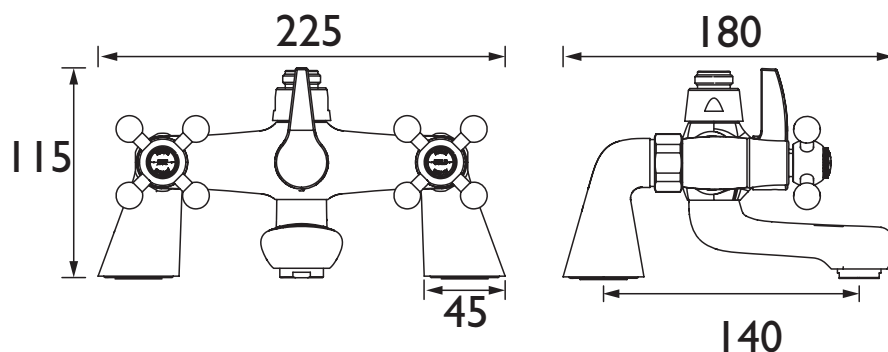

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Bath Filler (mixed)	22.8	36	50.9	72	88.2	113.9
Through Handset (mixed)	6.5	10.3	14.6	20.7	25.3	32.7

TECHNICAL DATA SHEET



BRISTAN

D6