SM BF C

SMILE Tap Range Smile Bath Filler Chrome



Specification					
Product Type:	Bathroom Tap				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Lever				
Connection Inlet:	3/4" BSP				
Connection Outlet:	Flow Straightener				
Number of Tap Holes:	2				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.2				
Maximum Dynamic Pressure (bar):	5.0				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				


Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability

Product Certifications:



WRAS Certificate No: 1609014 WRAS Expiry Date: 30/09/2021 Dimensions (measurements in mm)

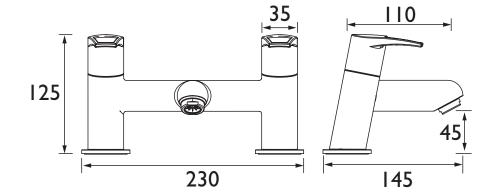

For more products, visit our website: http://www.bristan.com



Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
SM BF C (mixed)	22.2	36.9	53.1	75	91.8	118.6		

TECHNICAL DATA SHEET



BRISTAN