MILA Tap Range Mila Bath Pillar Taps Chrome



Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever				
Connection Inlet:	3/4" BSP				
Connection Outlet:	Flow Straightener				
Number of Tap Holes:	2				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 Turn				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	60 °C				
Maximum Static Pressure (bar):	10 bar				
Isolation Included:	No				

Dimensions (measurements in mm)

Features:


- You really can count on Bristan taps as they are designed, engineered and tested to last with our precise glide and secure fix components plus a hard wearing luminance chrome finish, all under a 10 Year guarantee for peace of mind
- Long life and easy to use 1/4 turn ceramic disc valves
- Supplied with metal fixing nut for added durability and to secure your tap in place
- Easy-to-use lever handles
- Suitable for high and low pressure water systems

Product Certifications:

For more products, visit our website: http://www.bristan.com



-	<u>,</u>	0	
140			
	<u>'</u>	50	→

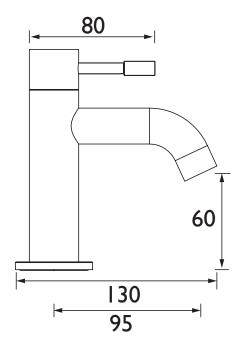

Flow Rates (I/min)									
System Pressure (bar)	0.2	0.5	1	2	3	5			
MI 3/4 C (Cold)	12.3	20.5	29.3	41.7	50.4	64.8			
MI 3/4 C (Hot)	11.5	19.2	28.0	39.8	48.9	60.7			

TECHNICAL DATA SHEET



