CELLO Tap Range Cello Monobloc Sink Mixer Chrome

CE SNK C




Features:

- A hard-wearing, flawless chrome finish that lasts for years
- Long life ceramic cartridge for added durability and ease of use
- All in one box Includes flexible tails and fixing kit so nothing to buy separately
- Suitable for high and low pressure water systems
- 5 year guarantee

Product Certifications:



Sŀ

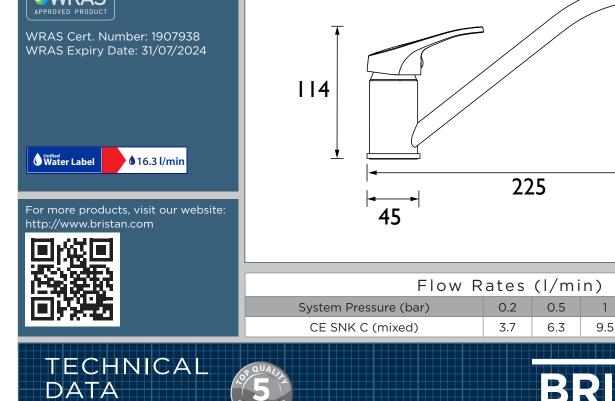


| Bristan, Birch Coppice Business P | Park, Dordon, Tamwort | h, B78 1SG. Web Site: v | www.bristan.com Telephone | : 0330 026 6273. Ema | ail: enquire@bristan.c |
|-----------------------------------|-----------------------|-------------------------|---------------------------|----------------------|------------------------|
| | | | | | |

com See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

| Spec | Specification | | | | |
|-----------------------------------|-----------------------------------|--|--|--|--|
| Product Type: | Kitchen Tap | | | | |
| Main Construction Material: | Brass | | | | |
| Mount Type: | Deck Mounted | | | | |
| Handle Type: | Lever Handle | | | | |
| Connection Inlet: | 1/2" BSP Flexible Tails | | | | |
| Connection Outlet: | M24 Flow Straightener | | | | |
| Number of Tap Holes: | 1 | | | | |
| Valve/Cartridge Type: | 35mm Cartridge | | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | | |
| Minimum Dynamic Pressure (bar): | 0.2 bar | | | | |
| Maximum Dynamic Pressure (bar): | 5.0 bar | | | | |
| Maximum Hot Water Temperature °C: | 60 °C | | | | |
| Maximum Static Pressure (bar): | 10 bar | | | | |
| Flow Type: | Single Flow | | | | |
| Isolation Included: | No | | | | |
| | | | | | |

Dimensions (measurements in mm)

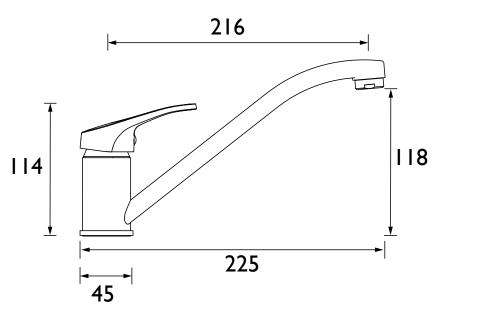

1

9.5

2

13.30

3

16.3

5

21.5

D3