



# **Additional Information**

**Prevent cross contamination** 

Fully compliant to part G24 of the water regulations

DZR brass construction (check valve / iso)

Provides a temporary connection between the cold main and a sealed heating system

Blanking caps available to protect your installation from debris once the filling loop has been removed

## **Product**

FL12041500 - 15mm G24 WRAS Approved Filling Loop 16 Bar

FL12041510 - 15mm G24 WRAS Approved Filling Loop with End Caps 16 Bar

FL12041515 - 15mm Filling Loop with Gauge 10 Bar


ECAP2046 - 1/2" Filling Loop End Caps

# **Technical Specification**


Max Inlet Pressure (static): 10 Bar Max Inlet Temperature: 85°C

Connections: 15mm Compression

#### Isolation valve



#### Flexible hose

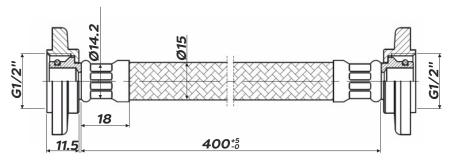

## Double check valve

