FRN EFSNK BB

FERN Tap Range Fern Easyfit Mono Sink Mixer Brushed Brass




Features:

- Unique patented top fix design, for simple installation from above the sink
- Simply drop and twist the top fix base into the tap hole from above, and lock into place with the Allen key provided
- Two supplied isolation valves and flexi tails mean you can connect to the water supply at this point and isolate the base
- Push the tap on to the base and secure into position with the supplied Easyfit tool and screws
- Everything you need in the box including an Allen key, isolation valves, Top Fix Easyfit base, Easyfit tool and flexi tails

	277
Product Certifications:	377
APPROVED PRODUCT	
WRAS Certificate No: 240403007 WRAS Expiry Date: 30/04/2029	
Winified Water Label	
For more products, visit our website:	L
http://www.bristan.com	
商業	
	System
	FRN EFS
TECHNICAL DATA	5 QUALIA 5 10
	YEARS LO GE YEARS

Specification						
Product Type:	Kitchen Taps					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Round					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:	Housed M22 8L/M Aerator					
Number of Tap Holes:	1					
Valve/Cartridge Type:	1/2" Ceramic Disc Valves					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.3 bar					
Maximum Dynamic Pressure (bar):	5 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single Flow					
Isolation Included:	Yes					
Isolation Included:	Yes					

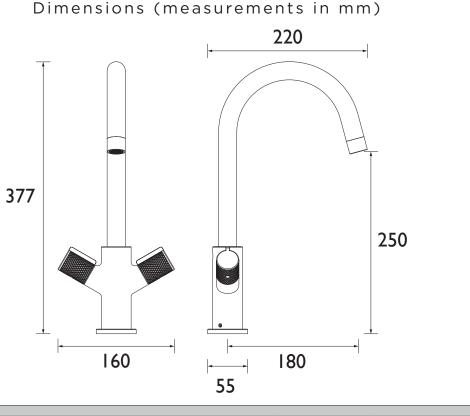

化增速的	Flow Rates (I/min)							
	System Pressure (bar)	0.3	0.5	1	2	3	5	
	FRN EFSNK BB (mixed)	2.2	4.4	6.3	8.4	8.4	8.4	
TECHNICAL DATA SHEET	or QUALIA S S S S S S S S S S S S S S S S S S S		В	RIS	STZ		D1.1	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.