



See the advantages of
our NEW & Improved
Electronic Actuator
Without Calibration

Ultra THB23031



You asked for improvements and we listened to you!

- Automatic, dynamic, hydraulic balancing very easy, install and you're "done"
- Ready to use without calibration
- Two-colored LED lights (green/red) as status indicator
- Ideal for new buildings, renovations and retrofits
- High precision thanks to the electronic motor
- Fast valve opening and closing times
- Optimal for use with heating or cooling



**5 YEAR
WARRANTY**


For more
information,
please visit our website
www.saluscontrols.com/gb
or call us on 01226 323961

For automatic and dynamic hydraulic balancing choose

Ultra THB23031



Non-Balanced System

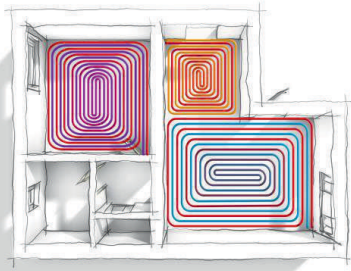


Manually regulated heating systems cannot maintain a constant surface temperature.




Systems Balanced Hydraulically by Hand:

- Time-intensive, calculations required for each heating circuit.
- Each flow limiter needs to be manually adjusted to the exact setting.

Fully Automated System with Dynamic Balancing

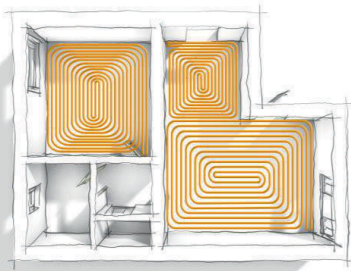

The Ultra THB23031 provides automatic balancing for uniform temperatures across all surfaces.



Automatic, Dynamic Hydraulic Balancing with the Ultra THB23031 Electronic Actuator:

- Open the flow limiter completely (if available).
- Mount the actuator on the return line with M30 x 1.5 mm thread.
- Attach the sensors (supply and return lines).

The system is now ready for commissioning.



5 YEAR WARRANTY

For more information, please visit our website www.saluscontrols.com/gb or call us on 01226 323961