DSC WMBF C

DESCENT Tap Range Descent Wall Mounted Bath **Filler Chrome**



Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps, **Recess shower and Accessories** available.
- Not suitable for use with roll top-baths.

Product Certifications:




WRAS Certificate No: 2304903 WRAS Expiry Date: 30/04/2028

For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Wall			
Handle Type:	Lever Handles			
Connection Inlet:	22mm Compression			
Connection Outlet:	Open			
Number of Tap Holes:	3			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.5 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Dimensions (measurements in mm)

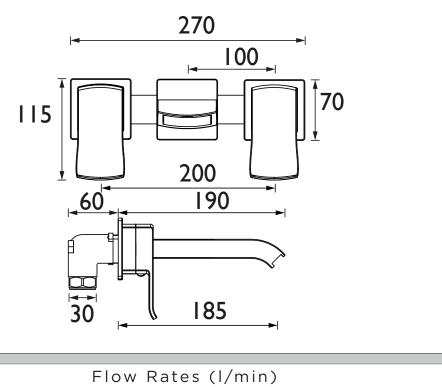

	System Pressure (bar)	0.5	1	2	3	5
225909 (mixed)		22.4	32.5	45.2	55.4	71.4
TECHNICAL DATA SHEET	PLARS +		BR	187	TAN	
Bristan, Birch Coppice Business Park, Dordon, Tamworth,	B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6	6273. Email: en	quire@bristan.@	com.		

- 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.