

Product Finish: Brushed Nickel

Product code: AT2233
EAN13 barcode: 5060879994577



Product features:


- Traditional French provincial styling
- Quarter turn handle action for precise flow control
- Metal construction throughout
- Flow Limited to 5 Litres per Minute for Part G compliance
- Supplied with fixed 1/2" inlets

Additional information / Parts included:

Includes additional Honeycomb 1.5gpm

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

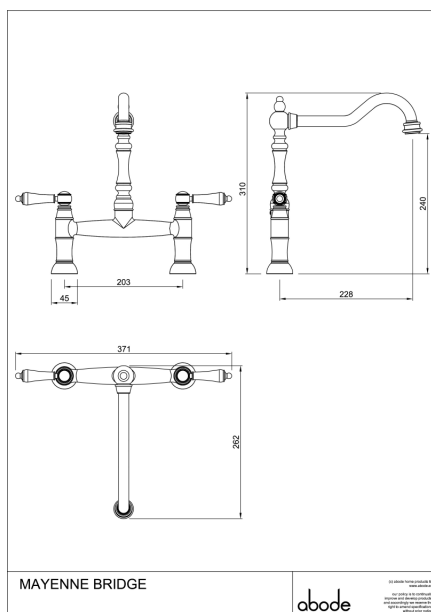


- **Overall, Height / projection:** 310 mm
- **Exit reach:** 228 mm
- **Exit height:** 240 mm
- **Centre distance(s):**
- **Base diameter(s):** 45 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 50 mm
- **Spout diameter:** 20 mm
- **Spout aerator size:** M22 x 1

Packaged properties:

Box length: 575mm	Box depth: 80mm
Box width: 350mm	Units per outer: 5
Tap only weight: 2.33kg	Boxed weight: 3.41kg

Product flow characteristics:

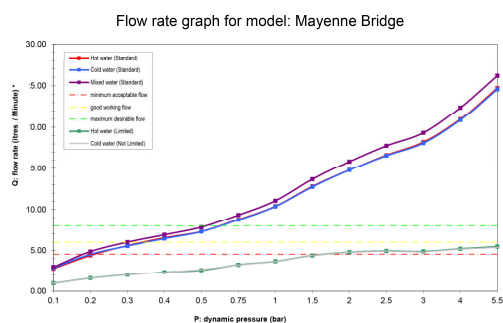

- **Min / Max water pressure:** 0.20 / 5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 19.34
- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** Single flow
- **Non return valve(s):** None
- **Aerator type:** Honeycomb Aerator
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw
- **Tail pipe inlet / outlet size:** N/A / 1/2" BSP Male
- **Inlet pipe type / length:** Fixed threaded inlets / 120 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year