

- ### Packaged properties:


Box depth(mm): 190

Boxed weight (Kg): 2.62

Includes pop up waste?: No

Additional comments:

• **Product mounted where:** 0 mm
 • **Recommended hole size:**

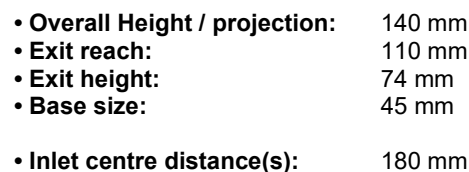

- **Min. fitting depth required:** 25 mm
- **Max. surface depth:** 0

[illegible]

- **Min / Max water pressure (bar):** 1.40* / 5
*Detailed minimum pressure requirements for this product: Bath 0.75, Shower 1.4 (bar)
- **Part G max. mixed flow rate at 3 bar (l/m):** 0.00
- **Inlet connection type / length:** Fixed / 43 mm
- **Inlet (plumbing connection) / outlet size:** 3/4" M / n/a
- **Product flow characteristics:** Single flow
Non return valve(s) supplied or position: no
- **Aerator type:** Neostral flow straightener
- **Control valve type:** 3/4" QT CD (3/4 X 46.5 X24)
- **Includes output diverter?:** Yes
- **Inlet meshed particle filters included:** n/a
- **Shower hose type / length:** PVC Hose / 1.50 m

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives