PRISM SHWR PK2

PRISM Shower Range Complete Prism Shower Pack 2



Features:

- This versatile shower pack contains a Prism shower valve with integral two outlet diverter. It has a 200mm round fixed head with shower arm; and an adjustable riser shower kit with a single function large handset.
- Easy installation with an adjustable faceplate that fits total wall depths from 50mm to 75mm for a perfect flush finish
- Dual control flow and temperature are controlled separately
- Fully serviceable from the front
- 15mm inlet connections

Product Certifications:



WRAS Cert. Number: 2306911 WRAS Expiry Date: 30/06/2028




♦ 8.6 l/min

For more products, visit our website: http://www.bristan.com



| Specification | | | | | |
|--|-------------------------------------|--|--|--|--|
| Finish/Colour: | Chrome Plated | | | | |
| Main Construction Material: | Brass; ABS | | | | |
| No of Controls: | 3 | | | | |
| Shower Type: | Dual Control | | | | |
| Shower Head Type: | Both | | | | |
| Shower Kit: | Fixed Head and Adjustable Riser Kit | | | | |
| Valve/Cartridge Type: | 3/4" Ceramic Disc Valve 1/4 turn | | | | |
| Maximum Hot Water Supply Temperature °C: | 65 | | | | |
| Plumbing System Suitability: | Suitable for all plumbing systems | | | | |
| Minimum Dynamic Pressure (bar): | 0.2 | | | | |
| Maximum Dynamic Pressure (bar): | 5 | | | | |
| Maximum Static Pressure (bar): | 10 | | | | |
| Connection Inlet: | 15mm Compression | | | | |
| Connection Outlet: | G 1/2" | | | | |
| Isolation Valve Included: | No | | | | |
| Check Valve Included: | Yes | | | | |

Dimensions (measurements in mm)

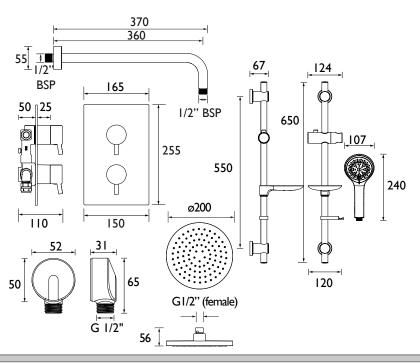

| Flow Rates (I/min) | | | | | | | |
|--|-----|-----|-----|------|------|------|--|
| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 | |
| Through Handset (mixed) | 2.1 | 3.3 | 4.7 | 6.6 | 8.1 | 10.5 | |
| Through Fixed Head (mixed) | 2.2 | 3.5 | 5 | 7 | 8.6 | 11.1 | |
| With Flow Limiters (valve only; mixed) | 3.9 | 7 | 9.4 | 11.1 | 11.2 | 12.2 | |

TECHNICAL DATA SHEET



BRISTAN