TECHNICAL DATA SHEET

CADET BATH FILLER



BRISTAN


Product Specification

Product Code: Finish: Product Type: Construction:

Valve Type: Supply: Inlet Connections: Working Pressures: CAD BF C Chrome plated Contemporary Bodies are of all brass construction and is designed to conform to BS EN 200 ¼ Turn ¾ " CD Valve Suitable for all plumbing systems ¾ " BSP Min 0.2 Bar Max 5.0 Bar

Additional Information

- •Chrome plated to BS EN 248.
- •Supplied with metal handles.
- Supplied with metal backnuts.

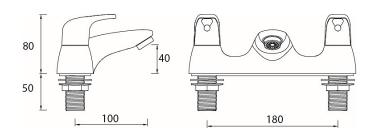

Technical Advice:

For further information please call 0844 7016273 or email customercare@bristan.com.

Guarantee:

5 years covering manufacturing faults.

Flow Rates (litres per minute)

System Pressure	0.2 bar	0.3 bar	0.5 bar	1.0 bar	2.0 bar	3.0bar	4.0bar	5.0 bar
CAD BF C (hot)	15.1	20.5	27.7	39.8	57.7	70.7	81.6	91.2
CAD BF C (cold)	15.9	20.5	28.1	39.9	57.3	70.2	81.0	90.6
CAD BF C (mixed)	24.5	31.4	42.4	61.2	86.5	105.9	122.2	136.6

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u>



D1

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.