TECHNICAL DATA SHEET


1901 Concealed Concentric Shower Valve Only

Product Specification

Product Code:	N2 CSHCVO C
Finish:	Chrome
Connection Inlet:	15mm Compression
Inlet Centres:	168mm
Maximum Temperature:	Pre-set 42oC
Pressure Range:	Min 0.1 Bar, Max 5.0 Bar

Additional Information

- Chrome plated to BS EN 248:2002
- •Supplied with 2 x 8 l/min. flow regulators
- Factory fitted regulators means this is a water saving shower
- •Matching taps available

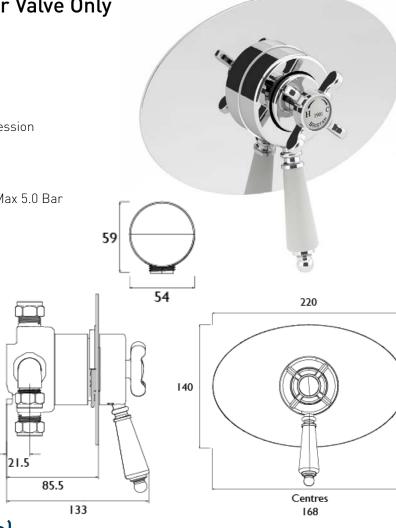

Flow Rates (litres per minute)

System Pressure	0.1bar	0.2bar	0.5bar	1bar	2bar	3bar	5bar
With Flow Regulators			3.6	5.08	7.19	8.8	8.8
Without Flow Regulators	2.65	3.74	5.92	8.37	11.84	14.5	18.72

0844 7016273

D2

Technical Advice:

For further information please call 0844 7016273 or email <u>customercare@bristan.com</u>

Guarantee:

5 years covering manufacturing faults.

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u>

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

