

OP THBF WMH C

COMMERCIAL OPAC Tap Range Opac Thermostatic Wall Mount Dual Control Bath Filler with Chrome Handles



Features:

- Cool touch body for ultimate user safety
- Easy installation with first/second fix fixing kit
- High performance at low pressures
- TMV3 approved
- Complies with D08 specification
- Integral isolator & flushing mechanism for easy maintenance.

Product Certifications:

WRAS Expiry: 30/11/2019
WRAS Cert: 1411027



TMV3 Expiry: 07/11/2019
TMV3 Cert: BC1486/1114




For more products, visit our website:



Specification

Style:	Contemporary
Product Type:	Commercial
Finish/Colour:	Chrome
Main Construction Material:	Brass
Mount Type:	Wall
Handle Type:	Lever
Connection Inlet:	3/4" BSP
Number of Tap Holes Required:	2
Valve/Cartridge Type:	Thermostatic
Plumbing System Suitability	All, preferably balanced
Working Pressure Range:	0.2-5 Bar
Maximum Hot Water Temperature: °c	65
Maximum Dynamic Pressure: (bar)	5
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Flow Rate: (l/min @ 3 bar)	38
Outlet Connection:	M28 Flow Straightener
Isolation Included:	No
Temperature Setting: °c	38 (over-rides to 44)

Dimensions (measurements in mm)

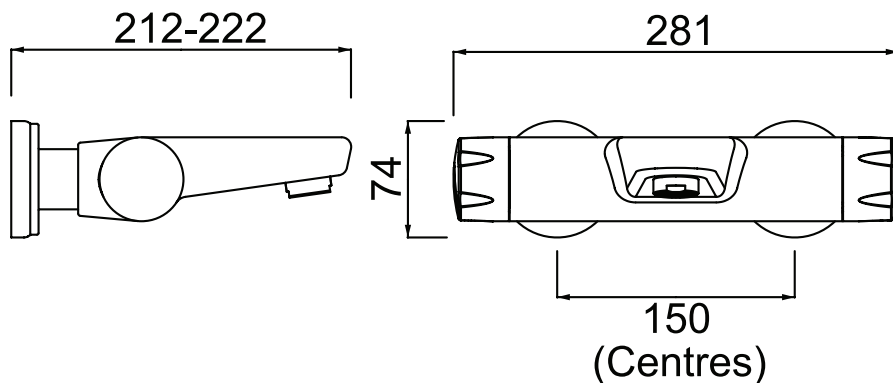

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
OP THBF WMH C	14	21	30	38	49

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D4