



STAINLESS ES

THE NEW UNVENTED CYLINDER
RANGE FROM GLEDHILL



25 YEAR
WARRANTY

ONE NAME. EVERY SOLUTION.

WWW.GLEDHILL.NET

STAINLESS ES DIRECT AND INDIRECT

90 | 120 | 150 | 170 | 200 | 250 | 300 LITRES



KEY FEATURES

- Gledhill proven technologies and quality manufacturing at a competitive price
- Manufactured from highly corrosion-resistant duplex stainless steel
- Delivers mains pressure hot water, enabling high flow rates for showers and baths, without the need for a boost pump
- 40mm insulation to reduce heat loss
- Supplied with full NSF WRC and WRAS independent approvals



25 YEAR
WARRANTY




GAS OR OIL
BOILERS



IMMERSION
HEATER

TECHNICAL SPECIFICATION

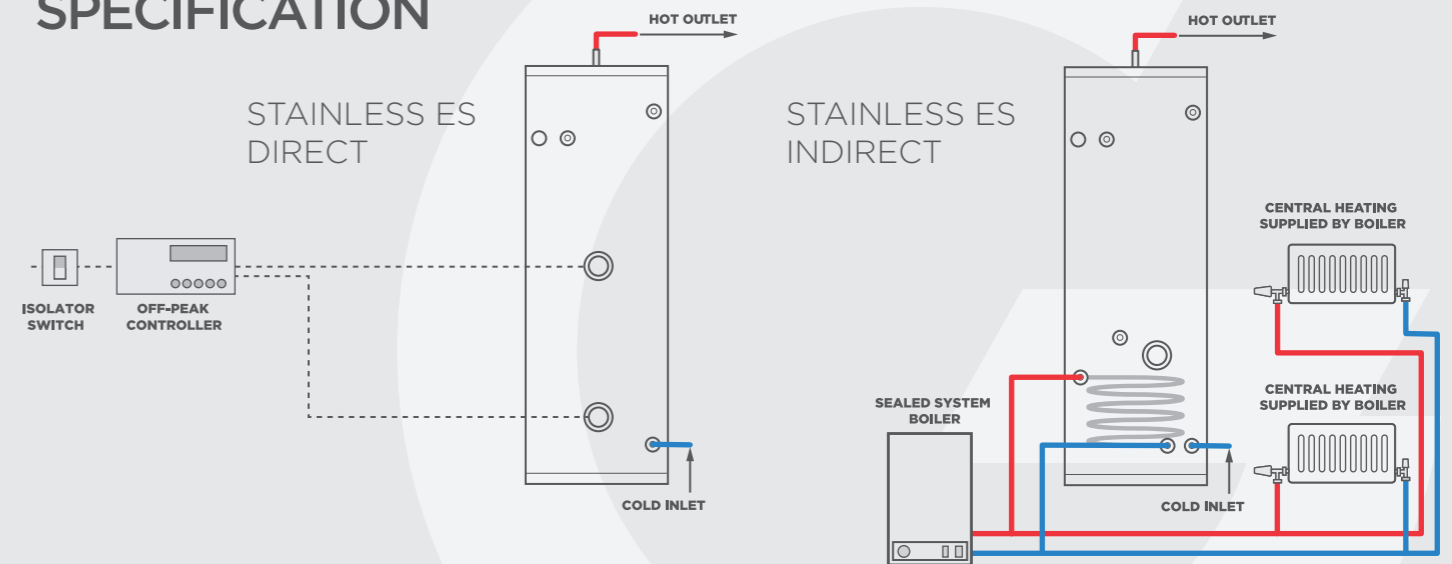

STAINLESS ES DIRECT

Description		D90	D120	D150	D170	D200	D250
Product stock code		SESINPDR090	SESINPDR120	SESINPDR150	SESINPDR170	SESINPDR200	SESINPDR250
ErP rating		C	C	C	C	C	C
Heat loss	watts	36	43	52	57	65	79
Capacity	litres	93	118	149	169	198	248
Height	mm	658	832	1012	1131	1305	1603
Overall diameter	mm	530	530	530	530	530	530
Weight (empty)	kg	15	19	22	24	27	33
Weight (full)	kg	108	137	171	193	225	281
Pressure regulator	bar	3	3	3	3	3	3
Expansion vessel size	litres	12	12	18	18	24	24
kW rating of primary coil	kW	n/a	n/a	n/a	n/a	n/a	n/a

STAINLESS ES INDIRECT

Description		IND90	IND120	IND150	IND170	IND200	IND250	IND300
Product stock code		SESINPIN090	SESINPIN120	SESINPIN150	SESINPIN170	SESINPIN200	SESINPIN250	SESINPIN300
ErP rating		B	B	B	B	C	C	C
Heat loss	watts	36	43	52	57	65	79	92
Capacity	litres	93	118	149	169	198	248	295
Height	mm	658	832	1012	1131	1305	1603	1895
Overall diameter	mm	530	530	530	530	530	530	530
Weight (empty)	kg	17	20	23	26	29	35	41
Weight (full)	kg	110	138	172	195	227	283	336
Pressure regulator	bar	3	3	3	3	3	3	3
Expansion vessel size	litres	12	12	18	18	24	24	35
kW rating of primary coil	kW	13.4	14.6	14.0	16.2	16.0	16.7	18.3

NOTES:

- 1 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 2 For further ErP information, please refer to the installation manual at www.gledhill.net
- 3 The schematics shown above are representational, please refer to the installation manual for full technical requirements

SPARES

Gledhill cylinders are manufactured to the highest quality standards. In the unlikely event that you require a spare part, you can contact Gledhill Spare Parts, on:

01253 474412

or visit www.gledhill-spares.net

HERE TO HELP

If you're looking for technical assistance while you're on the job, give our technical team a call. With many years' experience, they're an invaluable resource to have at the end of the phone.

FOR TECHNICAL
ADVICE PLEASE CALL
01253 474584



Gledhill Building Products Limited
Sycamore Estate,
Squires Gate,
Blackpool FY4 3RL

T: 01253 474550
E: enquiries@gledhill.net

WWW.GLEDHILL.NET



GBP91 09.17



Due to a programme of continuous improvement Gledhill Building Products reserves the right to modify products without prior notice. It is advisable to check the product technical detail by using the latest design and installation manuals available from our technical support team or on our website. It is an offence to copy or adapt this document without consent of the owner.