

AquaNova LE

Instantaneous multipoint water heater

- ErP CLASS A
- 2 YEAR WARRANTY =
- SIMPLE INSTALLATION =
 - FLEXIBLE FLUEING
- ELECTRONIC IGNITION =
 - DIGITAL DISPLAY
- NATURAL GAS & LPG VERSIONS =




AquaNova LE

Instantaneous multipoint

water heater

Dimensions and Clearances (mm)

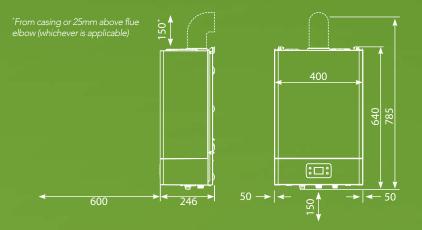

- Fully compliant with the Energy-related Products Directive.
- Suitable for domestic and small light commercial applications.
- 2 year warranty.⁽¹⁾
- Provides instant hot water to multiple outlets, such as to a kitchen and bathroom.
- Ideal for replacement installations for properties that require hot water supply only.
- AquaNova LE has a 30kW heat output and high flow rate of 13.2 l/min.
- Simple installation and commissioning. All connections are easily accessible and the appliance is supplied with a built-in fly lead.
- Digital display and user interface for ease of use.
- Keypad lock function (locks the keypad to avoid tampering).
- Temperature lock function (limits the outlet temperature).
- Centigrade or Fahrenheit option (can display temperature in either C or F).
- Solar integration (can accept pre-heated water).
- Waiting time function (delays HW request 0.5sec to 10sec).
- Fault code display function.
- Electronic ignition eliminates the need for a constantly running fan or energy wasteful pilot light.
- Technical parameters are passcode protected.
- Continuous gas modulation and electronic temperature sensing gives accurate temperature control.
- AquaNova LE can be flued horizontally or vertically using Vokèra's concentric Uni flue or twin flue systems.
- Includes stand-off brackets (required for rear outlet flue exit).
- Simple to service. No diaphragm or water section. This reduces maintenance requirements.
- Low NO_x emissions.

⁽¹⁾Subject to registration and annual service



Vokèra Limited, Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

E: enquiries@vokera.co.uk W: www.vokera.co.uk T: 0844 391 0999 F: 0844 391 0998

Vokèra Limited reserve the right to change specification without prior notice. Consumers statutory rights are not affected. E&0E Issue 11/18 NM

SPECIFICATIONS	AQUANOVA LE
PRODUCT ORDER CODE (NATURAL GAS)	20143490
PRODUCT ORDER CODE (LPG)	20143493
DOMESTIC HOT WATER	
MAXIMUM HEAT INPUT (kW)	30.0
FLOW RATE – 35°C RISE (L/MIN)	13.2
DIMENSIONS	
HEIGHT (MM)	640
WIDTH (MM)	400
DEPTH (MM)	246
WEIGHT	
DRY WEIGHT (KG)	21
CONNECTIONS	
GAS	15MM
DHW INLET & OUTLET	15MM
ELECTRICAL	
VOLTAGE (V/HZ)	230/50
EFFICIENCY	
ERP WATER HEATING EFFICIENCY (XL PROFILE) (CLASS/%)	A/82.0

FLUE LENGTHS	AQUANOVA LE
FLUE DETAILS (CONCENTRIC)	
MAX HORIZONTAL FLUE LENGTH (60/100MM)	2.6M
MAX VERTICAL FLUE LENGTH (60/100MM)	3.6M
FLUE DETAILS (TWIN PIPES)	
MAX HORIZONTAL FLUE LENGTH (80MM/80MM)	6M/6M + TERMINAL
MAX VERTICAL FLUE LENGTH (80MM/80MM)	6M/6M + TERMINAL

WE ARE SOCIAL

U

In