JAVA Tap Range Java Basin Pillar Taps Chrome



1/2 C

J

Features:


- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy-to-use lever handles

Product Certifications:

WRAS Certificate No: 1607001 WRAS Expiry Date: 31/07/2021	
For more products, visit our website:	
http://www.bristan.com	Sys
TECHNICAL DATA SHEET	P QUAL FA

Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Lever				
Connection Inlet:	1/2"BSP				
Connection Outlet:	M24 Flow Straightener				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/2" Ceramic Disc Valve - 1/4 turn				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Isolation Included:	No				

Dimensions (measurements in mm)

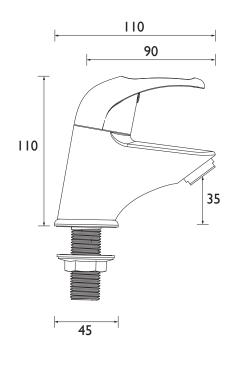

	Flow Rates (I/min)						
化输送机	System Pressure (bar)	0.2	0.5	1	2	3	5
	J 1/2 C (Cold)	9	14.2	20	28.3	34.7	44.8
	J 1/2 C (Hot)	9	14.2	20	28.3	34.7	44.8
TECHNICAL DATA SHEET	S QUATTA S QUAT		В	RIS	ST/		D10

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.