



## Specification

<b>Product Type:</b>	Bath Tap
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Deck
<b>Handle Type:</b>	Lever
<b>Connection Inlet:</b>	3/4" BSP
<b>Number of Tap Holes:</b>	2
<b>Valve/Cartridge Type:</b>	1/4 Turn 3/4" Ceramic Disc Valve
<b>Plumbing System Requirements:</b>	Suitable for all plumbing systems
<b>Minimum Dynamic Pressure: (bar)</b>	0.2
<b>Maximum Dynamic Pressure: (bar)</b>	5.0
<b>Maximum Hot Water Temperature: °C</b>	60
<b>Maximum Static Pressure: (bar)</b>	10
<b>Flow Type:</b>	Dual
<b>Isolation Included:</b>	No
<b>Check Valve Supplied:</b>	No

## Features:


- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy to use lever handles
- Dual flow prevents hot water entering the mains supply
- High performance even at low pressures

## Product Certifications:



WRAS Cert. Number: 2009903  
WRAS Expiry Date: 30/09/2025

## Dimensions (measurements in mm)

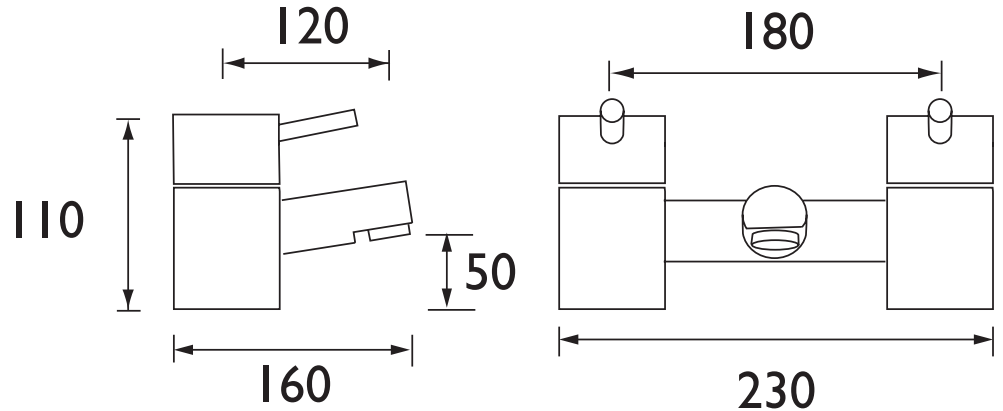

For more products, visit our website:  
<http://www.bristan.com>



## Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
PM BF C	27.9	47	67.6	96.2	117.8	152

# TECHNICAL DATA SHEET



# BRISTAN