APL ES BAS BLK

APPEAL Tap Range Appeal Eco Start Basin Mixer with Clicker Waste Black




Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Paddle Lever				
Connection Inlet:	1/2" BSP Flexible Tails				
Connection Outlet:	Housed 5lpm M24 Aerator				
Number of Tap Holes:	1				
Valve/Cartridge Type:	35mm Cold Start Upper Seal Cartridge				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.5 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	60°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Features:

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Long life ceramic cartridge for added durability and smooth control.
- Everything you need in the box including flexible tails and clicker waste so nothing to buy separately.
- On-trend matt black finish to make a statement in your bathroom or WC.
- 10-year parts and 1 year labour guarantee for peace of mind.
- Also available in chrome and brushed brass.
- Co-ordinating Bathroom taps available.

Dimensions (measurements in mm)

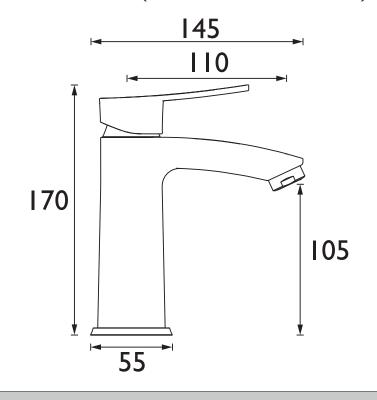

Product Certifications:

Unified Water Label

4.7 l/min

Flow Rates (I/min)							
System Pressure (bar)	0.5	0.5	1	2	3	5	
APL ES BAS BLK (mixed)	0.2	2.8	4.1	5	4.7	4.7	

TECHNICAL DATA SHEET





Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.