FLKIT40 C

SHOWER ACC Shower Range Single-function 4.0L Limited Shower Kit Chrome



Features:

 Flow Limited to 4.0lpm, Includes 1.5m hose, riser rail, rub-clean anti-limescale handset and hose retainer

Product Certifications:



WRAS Certificate No: 250303303 WRAS Expiry Date: 31/03/2030




♦ 3.6 l/min

For more products, visit our website: http://www.bristan.com



Specification					
Finish/Colour:	Chrome Plated				
Main Construction Material:	ABS				
Shower Kit:	Adjustable Riser				
Shower Head Type:	Single Function Handset with 4lpm limiter				
Rub Clean Handset:	Yes				
Mounting Type:	Wall				
Plumbing System Suitability:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Static Pressure (bar):	10 bar				
Maximum Hot Water Supply Temperature °C:	60				
Connection Inlet:	1/2" BSP				
Connection Outlet:	Handset				
Isolation Included:	No				
Check Valve Included:	No				
What's Included:	1x Handset, 1x Hose, 1x Riser Rail, 1x Slider, 1x Hose Retainer, 2x Wall Brackets, 2x Wall Fixings & Plugs				

Dimensions (measurements in mm)

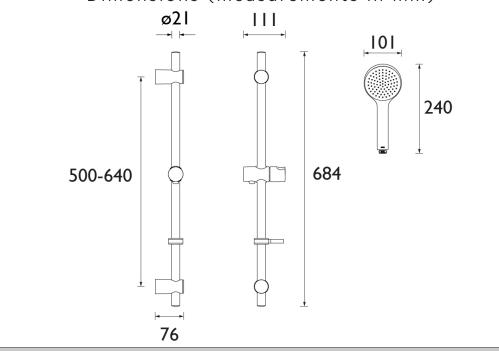

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Handset (mixed)	1.9	3.1	3.4	3.4	3.6	3.7		

TECHNICAL DATA SHEET



BRISTAN

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

** - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.